


MBES15_-5,08-V

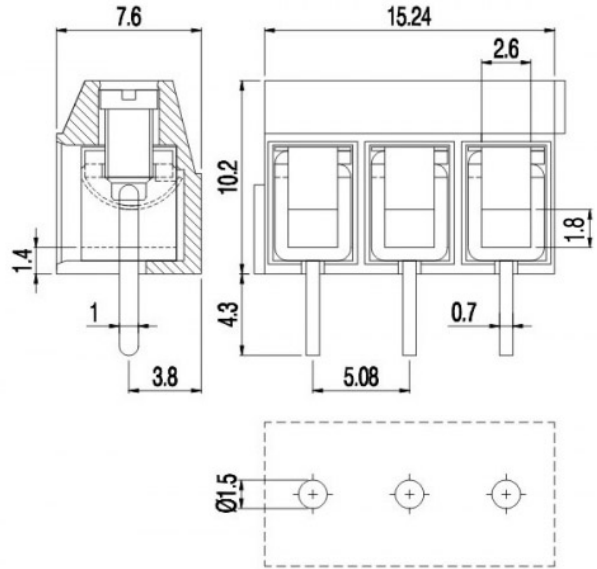

GENERAL INFORMATION

pitch	5,08 mm
Height	10.2 mm
Depth	7.6 mm
Dimensional class	Bassa
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	2.6 x 2 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	250 V
Test Voltage	2 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M2.5
Recommended torque	0.4÷0.44 Nm / 3.6÷4 in.lbs

APPROVALS DATA



	EN 60998-1	EN 60998-1	UL 1059
Current	17.5 A	24 A	20 A factory / 15 A field
Voltage	250 V	250 V	300 V
Wire section	1.5 mm ²	2.5 mm ²	14 ÷ 30 AWG
Torque	0.4 Nm	0.4 Nm	3.6 Lb-in
FILE	EP151	40019705	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Tin-plated copper alloy
Terminal	Tin-plated copper alloy

SCIP Number

b32084c4-2e9c-4e90-8741-a93d2ab379fe

COLOURS

Standard



On request



POLES

NAME

3D FILE

2	MBES152-5,08-V	File available
3	MBES153-5,08-V	File available
4	MBES154-5,08-V	File available