

## MG1Q\_\_-5





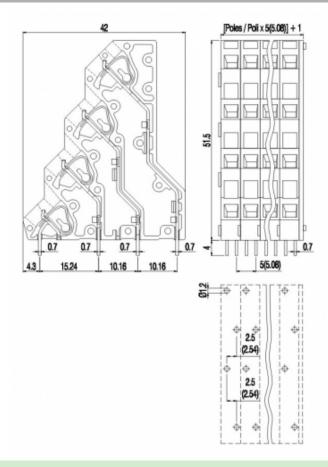

## **GENERAL INFORMATION**

pitch 5 mm Height 51.5 mm Depth 42 mm **Dimensional class** Bassa Wire section 2.5 mm<sup>2</sup> / 14 AWG Clamp opening size Wire stripping max 9 mm Operating temperature -40 ÷ +105 °C

**ELECTRICAL CHARACTERISTICS** 

24 A Current Voltage 250 V 2 kVrms/60s **Test Voltage** 

## **MECHANICAL CHARACTERISTICS**

**Screw** Recommended torque

**APPROVALS DATA** 







16 A factory / 16 A field

**UL 1059** Current

Torque - -

**FILE** - E178356

**MATERIALS** 

Housing PA - UL 94 V0

Screw

SpringSpring steelTerminalTin-plated copper alloy

COLOURS

Standard On request



POLES	NAME	3D FILE
01	MG1Q01-5	File not available for this product
02	MG1Q02-5	File not available for this product
03	MG1Q03-5	File not available for this product
04	MG1Q04-5	File not available for this product
05	MG1Q05-5	File not available for this product
06	MG1Q06-5	File not available for this product
07	MG1Q00-5 MG1Q07-5	File not available for this product
08	MG1Q07-5 MG1Q08-5	File not available for this product
	MG1Q09-5	•
09		File not available for this product
10	MG1Q10-5	File not available for this product
11	MG1Q11-5	File not available for this product
12	MG1Q12-5	File not available for this product
13	MG1Q13-5	File not available for this product
14	MG1Q14-5	File not available for this product
15	MG1Q15-5	File not available for this product
16	MG1Q16-5	File not available for this product
17	MG1Q17-5	File not available for this product
18	MG1Q18-5	File not available for this product
19	MG1Q19-5	File not available for this product
20	MG1Q20-5	File not available for this product
21	MG1Q21-5	File not available for this product
22	MG1Q22-5	File not available for this product
23	MG1Q23-5	File not available for this product