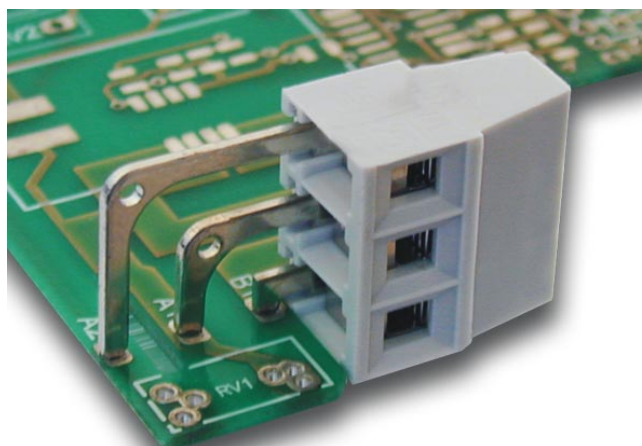


## ML253-5-D-LI

**GENERAL INFORMATION**

pitch	5 mm
Height	15.3 mm
Depth	9.5 mm
Dimensional class	Media
Wire section	2,5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2,7 x 2,7 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

**ELECTRICAL CHARACTERISTICS**

Current	16 A
Voltage	250 V

**MECHANICAL CHARACTERISTICS**

Screw	M3
Recommended torque	0,5±0 Nm / 4,5±4.4 in.lbs

**APPROVALS DATA**

	EN 60998-1		UL 1059
Current	16 A	-	15 A factory / 15 A field
Voltage	250 V	-	300 V
Wire section	2,5 mm <sup>2</sup>	-	14 AWG
Torque	0,5 Nm	-	4,5 Lb-in
FILE	CA02.01614	-	E178356

**MATERIALS**

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy

**COLOURS**

Standard



On request



**POLES**

3

**NAME**

ML253-5-D-LI

**3D FILE**

File available