


MLK13_-7,62-V

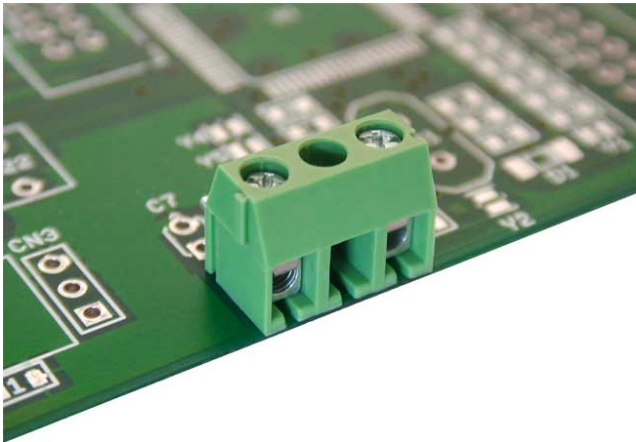

GENERAL INFORMATION

pitch	7,62 mm
Height	8.40 mm
Depth	6.80 mm
Dimensional class	Bassa
Wire section	1.0 mm ² / 16 AWG
Clamp opening size	-
Wire stripping	max 6 mm
Operating temperature	-40 ÷ +105 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	450 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	M2
Recommended torque	0.2÷0.22 Nm / 1.8÷2 in.lbs

APPROVALS DATA



			UL 1059
Current	-	-	6 A factory / 6 A field
Voltage	-	-	300 V
Wire section	-	-	16 AWG
Torque	-	-	1.8 Lb-in
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Tin-plated copper alloy
Terminal	Tin-plated copper alloy

COLOURS

Standard



On request

POLES	NAME	3D FILE
1	MLK131-7,62-V	File not available for this product
2	MLK132-7,62-V	File not available for this product