


MLK13_-7-V

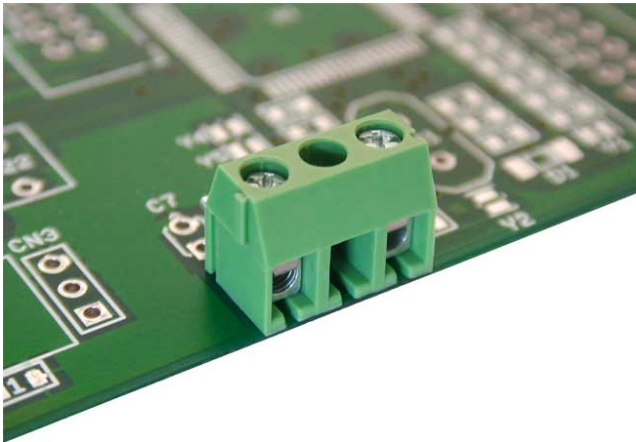

GENERAL INFORMATION

| | |
|-----------------------|------------------------------|
| pitch | 7 mm |
| Height | 8.40 mm |
| Depth | 6.80 mm |
| Dimensional class | Bassa |
| Wire section | 1.0 mm ² / 16 AWG |
| Clamp opening size | - |
| Wire stripping | max 6 mm |
| Operating temperature | -40 ÷ +105 °C |

ELECTRICAL CHARACTERISTICS

| | |
|-----------------|--------|
| Current | 10 A |
| Voltage | 450 V |
| impulse voltage | 2.5 kV |

MECHANICAL CHARACTERISTICS

| | |
|--------------------|----------------------------|
| Screw | M2 |
| Recommended torque | 0.2÷0.22 Nm / 1.8÷2 in.lbs |

APPROVALS DATA



| | | | |
|--------------|---|---|-------------------------|
| | | | UL 1059 |
| Current | - | - | 6 A factory / 6 A field |
| Voltage | - | - | 300 V |
| Wire section | - | - | 16 AWG |
| Torque | - | - | 1.8 Lb-in |
| FILE | - | - | E178356 |

MATERIALS

| | |
|----------|-------------------------|
| Housing | PA - UL 94 V0 |
| Screw | Galvanized steel |
| Clamp | Tin-plated copper alloy |
| Terminal | Tin-plated copper alloy |

COLOURS

Standard



On request

| POLES | NAME | 3D FILE |
|--------------|-------------|-------------------------------------|
| 1 | MLK131-7-V | File not available for this product |
| 2 | MLK132-7-V | File not available for this product |