



# MPFA-V68-L

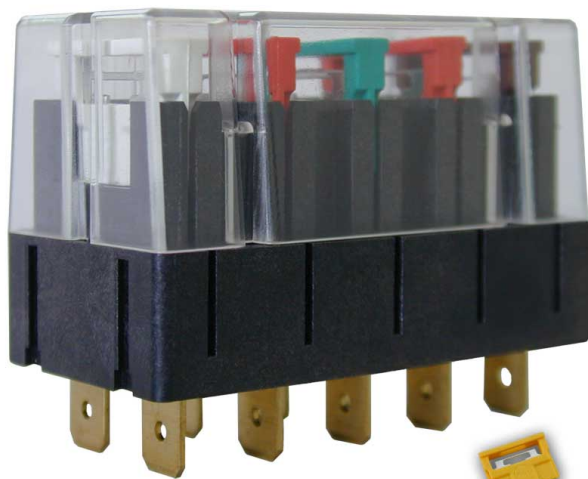

USE WITH ATO® FUSES

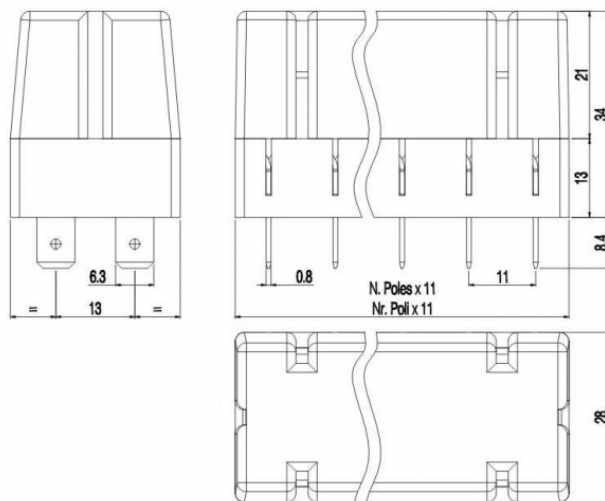

Use with ATO® fuses.  
Utilizzare con fusibili ATO®.

## GENERAL INFORMATION

pitch	-
Height	34 mm
Depth	13 mm
Dimensional class	n/a
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	1÷40 A
Voltage	- V
Test Voltage	-

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



Current	-	-	-
Voltage	-	-	-
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	-

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Nickel-plated copper alloy

**COLOURS**

Standard

On request



<b>POLES</b>	<b>NAME</b>	<b>3D FILE</b>
2	MPFA-V68-L	File not available for this product
3	MPFA-V68-L	File not available for this product
4	MPFA-V68-L	File not available for this product
5	MPFA-V68-L	File not available for this product
6	MPFA-V68-L	File not available for this product