
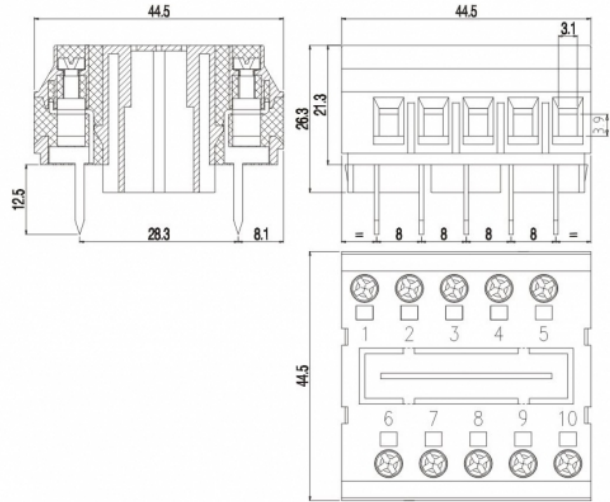


# MST410

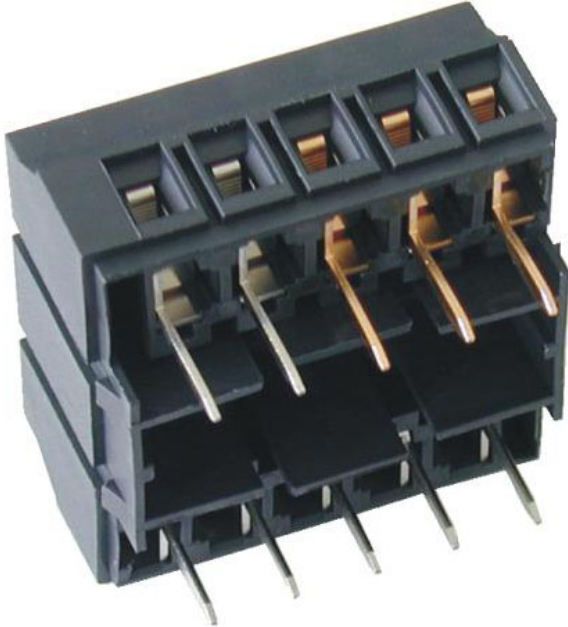

## GENERAL INFORMATION

pitch	-
Height	26.3 mm
Depth	44.5 mm
Dimensional class	Media
Wire section	4.0 mm <sup>2</sup> / 12 AWG
Clamp opening size	3.1 x 3.9 mm
Wire stripping	max 10 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	450 V
impulse voltage	2.5 kV

## MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 404÷444.4 in.lbs

## APPROVALS DATA



	<b>EN 60998-1</b>		<b>UL 1059</b>
Current	10 A	-	25 A factory / 20 A field
Voltage	450 V	-	300 V
Wire section	4.0 mm <sup>2</sup>	-	12 AWG
Torque	0.5 Nm	-	4.5 Lb-in
FILE	EQ204	-	E178356

## MATERIALS

Housing	PA - UL 94 V0
---------	---------------

Screw  
Clamp  
Terminal  
SCIP Number

Galvanized steel  
Nickel-plated copper alloy  
Nickel-plated copper alloy  
7ad67f7c-c98b-4a38-af9d-85b3fe2caf8c

**COLOURS**

Standard

On request

