
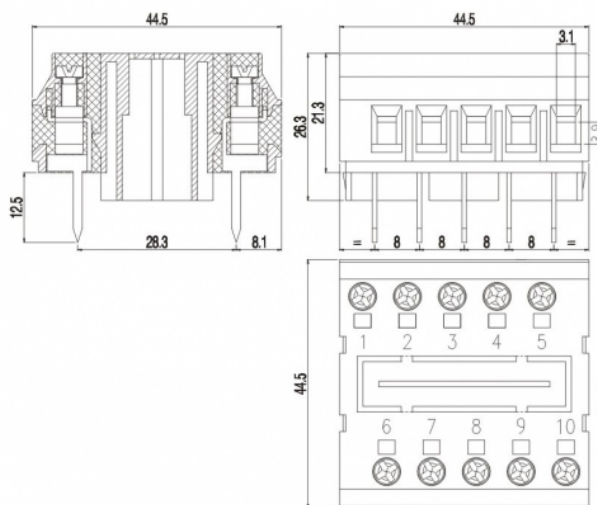


MST410

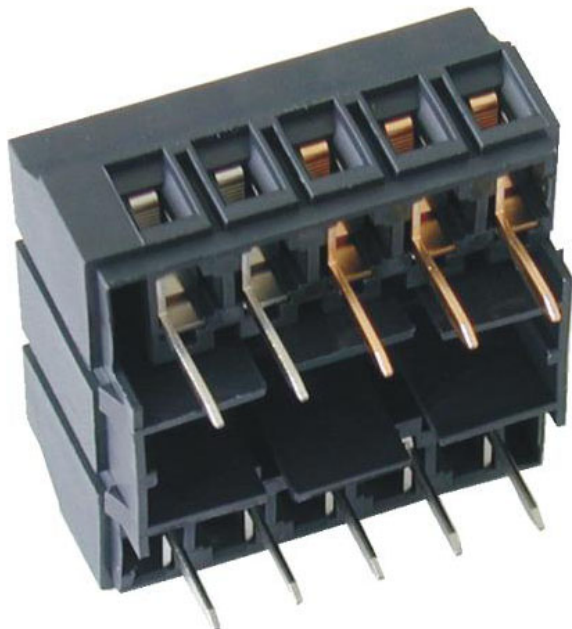

GENERAL INFORMATION

pitch	-
Height	26.3 mm
Depth	44.5 mm
Dimensional class	Media
Wire section	4.0 mm ² / 12 AWG
Clamp opening size	3.1 x 3.9 mm
Wire stripping	max 10 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	450 V
Test Voltage	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 404÷444.4 in.lbs

APPROVALS DATA



	EN 60998-1		UL 1059
Current	10 A	-	25 A factory / 20 A field
Voltage	450 V	-	300 V
Wire section	4.0 mm ²	-	12 ÷ 30 AWG
Torque	0.5 Nm	-	4.5 Lb-in
FILE	EQ204	-	E178356

MATERIALS

Housing	PA - UL 94 V0
---------	---------------

Screw
Clamp
Terminal
SCIP Number

Galvanized steel
Nickel-plated copper alloy
Nickel-plated copper alloy
7ad67f7c-c98b-4a38-af9d-85b3fe2caf8c

COLOURS

Standard

On request

