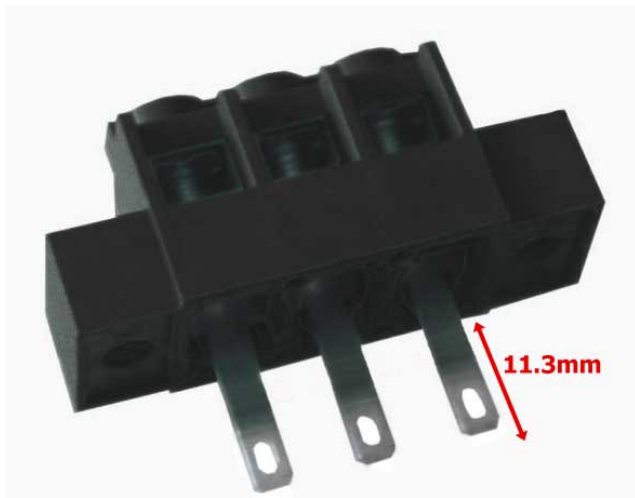


**MT17\_-7,5-FCK-L11****GENERAL INFORMATION**

pitch	7,5 mm
Height	17.6 mm
Depth	13.7 mm
Dimensional class	Media
Wire section	2x2.5 mm <sup>2</sup> / 2x14 AWG
Clamp opening size	-
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

**ELECTRICAL CHARACTERISTICS**

Current	24 A
Voltage	450 V
Test Voltage	2.5 kVrms/60s

**MECHANICAL CHARACTERISTICS**

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

**APPROVALS DATA**

			<b>UL 1059</b>
Current	-	-	20 A factory / 15 A field
Voltage	-	-	300 V
Wire section	-	-	14 ÷ 30 AWG
Torque	-	-	4.5 Lb-in
FILE	-	-	E178356

**MATERIALS**

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	-
Terminal	Tin-plated copper alloy

**COLOURS**

Standard

On request

**BK**

**GN**

**GY**

**BL**

**RD**

**YL**

**OG**

<b>POLES</b>	<b>NAME</b>	<b>3D FILE</b>
2	MT172-7,5-FCK-L11	File available
3	MT173-7,5-FCK-L11	File not available for this product