


MT21_-10-C

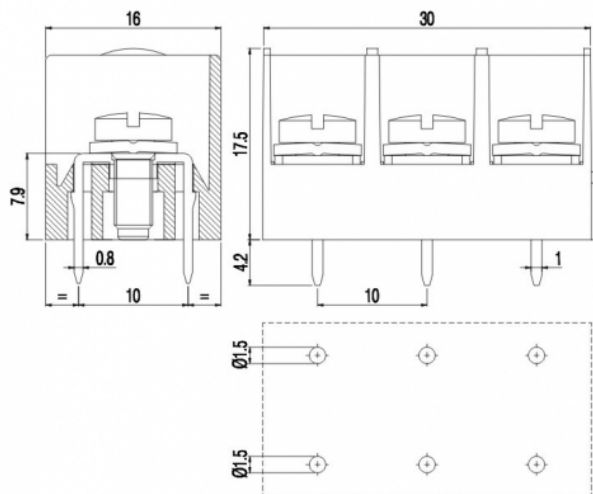

GENERAL INFORMATION

| | |
|-----------------------|----------------------------------|
| pitch | 10 mm |
| Height | 17.5 mm |
| Depth | 76 mm |
| Dimensional class | Media |
| Wire section | 2x2.5 mm ² / 2x14 AWG |
| Clamp opening size | - |
| Wire stripping | max 11 mm |
| Operating temperature | -40 ÷ +130 °C |

ELECTRICAL CHARACTERISTICS

| | |
|--------------|-------------|
| Current | 25 A |
| Voltage | 750 V |
| Test Voltage | 3 kVrms/60s |

MECHANICAL CHARACTERISTICS

| | |
|--------------------|------------------------------|
| Screw | M3 |
| Recommended torque | 0.8÷0.88 Nm / 7.2÷7.9 in.lbs |

APPROVALS DATA



| | EN 60998-1 | EN 60998-1 | UL 1059 |
|--------------|-----------------------|-----------------------|---------------------------|
| Current | 24 A | 25 A | 25 A factory / 20 A field |
| Voltage | 750 V | 750 V | 600 V |
| Wire section | 2x2.5 mm ² | 2x2.5 mm ² | 12 ÷ 26 AWG |
| Torque | 0.8 Nm | 0.8 Nm | 7.2 Lb-in |
| FILE | EQ203 | 40019721 | E178356 |

MATERIALS

| | |
|---------|------------------|
| Housing | PA - UL 94 V0 |
| Screw | Galvanized steel |

Clamp
Terminal

Tin-plated copper alloy

COLOURS

Standard



On request



POLES

NAME

3D FILE

| | | |
|---|------------|----------------|
| 2 | MT212-10-C | File available |
| 3 | MT213-10-C | File available |