


# MV47\_-7,62-H

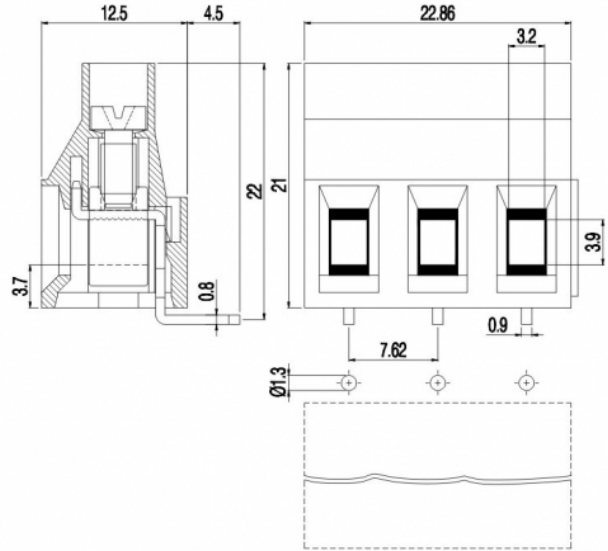

## GENERAL INFORMATION

pitch	7,62 mm
Height	21 mm
Depth	12.5 mm
Dimensional class	Alta
Wire section	6.0 mm <sup>2</sup> / 10 AWG
Clamp opening size	3.2 x 3.9 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	32 A
Voltage	750 V
impulse voltage	3 kV

## MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

## APPROVALS DATA



	EN 60998-1	EN 60998-1	UL 1059
Current	32 A	25 A	30 A factory / 30 A field
Voltage	750 V	750 V	300 V
Wire section	6.0 mm <sup>2</sup>	4.0 mm <sup>2</sup>	10 AWG
Torque	0.8 Nm	0.5 Nm	7.2 Lb-in
FILE	EP150	40014734	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel

Clamp  
Terminal  
SCIP Number

Nickel-plated copper alloy  
Tin-plated copper alloy  
1ccab36c-9cb5-4ef6-835d-596171944461

**COLOURS**

Standard



On request



POLES	NAME	3D FILE
2	MV472-7,62-H	File available
3	MV473-7,62-H	File available
4	MV474-7,62-H	File not available for this product
5	MV475-7,62-H	File not available for this product
6	MV476-7,62-H	File not available for this product
7	MV477-7,62-H	File not available for this product
8	MV478-7,62-H	File not available for this product
9	MV479-7,62-H	File not available for this product
10	MV4710-7,62-H	File not available for this product
11	MV4711-7,62-H	File not available for this product
12	MV4712-7,62-H	File not available for this product