


# MV476-7,62-S

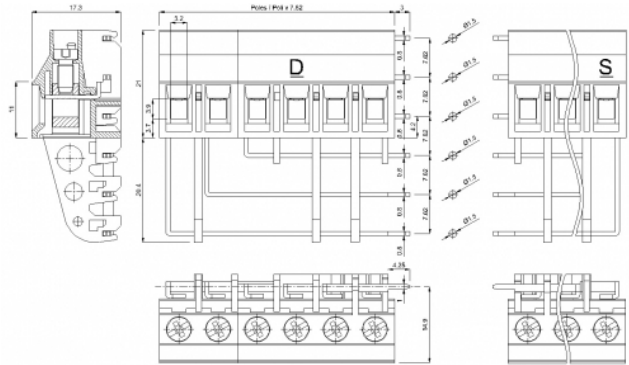

### GENERAL INFORMATION

pitch	7,62 mm
Height	21 mm
Depth	17.3 mm
Dimensional class	Alta
Wire section	6.0 mm <sup>2</sup> / 10 AWG
Clamp opening size	3.2 x 3.9 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

### ELECTRICAL CHARACTERISTICS

Current	32 A
Voltage	750 V
	-

### MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

### APPROVALS DATA



Current	-	-	<b>UL 1059</b>
Voltage	-	-	36 A factory / 30 A field
Wire section	-	-	600 V
Torque	-	-	10 AWG
FILE	-	-	7.2 Lb-in
	-	-	E178356

### MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy

**COLOURS**

Standard



On request



**POLES**

6

**NAME**

MV476-7,62-S

**3D FILE**

File not available for this product