


# MV49\_-19,04-V

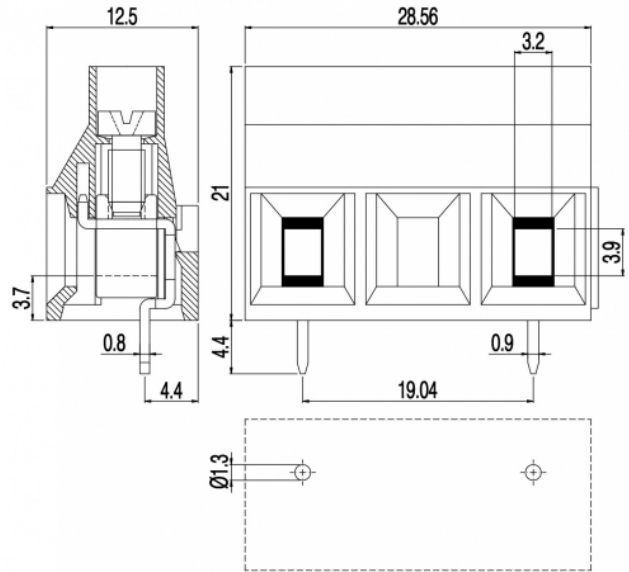

## GENERAL INFORMATION

pitch	19,04 mm
Height	21 mm
Depth	12,5 mm
Dimensional class	Alta
Wire section	6.0 mm <sup>2</sup> / 10 AWG
Clamp opening size	3.2 x 3.9 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	32 A
Voltage	750 V
impulse voltage	3 kV

## MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

## APPROVALS DATA



	EN 60998-1	EN 60998-1	UL 1059
Current	32 A	25 A	30 A factory / 30 A field
Voltage	750 V	750 V	600 V
Wire section	6.0 mm <sup>2</sup>	4.0 mm <sup>2</sup>	10 AWG
Torque	0.8 Nm	0.8 Nm	7.2 Lb-in
FILE	EP150	40014734	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy

SCIP Number

c1d7b77c-07f2-4fff-b171-2a85bced087d

**COLOURS**

Standard

On request



**POLES**

**NAME**

**3D FILE**

1	MV491-19,04-V	File not available for this product
2	MV492-19,04-V	File not available for this product