


# MVI\_-12,7-V

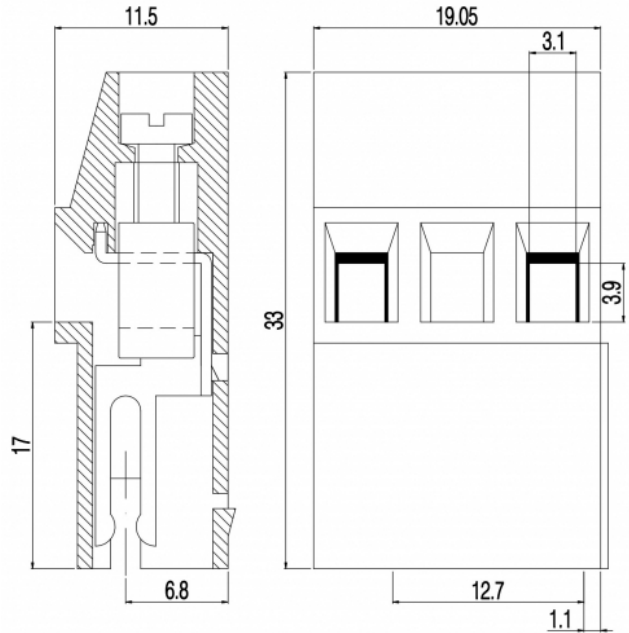

### GENERAL INFORMATION

pitch	12,7 mm
Height	33 mm
Depth	11.5 mm
Dimensional class	Media
Wire section	4.0 mm <sup>2</sup> / 12 AWG
Clamp opening size	3.2 x 3.5 mm
Wire stripping	max 10 mm
Operating temperature	-40 ÷ +130 °C

### ELECTRICAL CHARACTERISTICS

Current	25 A
Voltage	750 V
impulse voltage	3 kV

### MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

### APPROVALS DATA



Current	-	-	<b>UL 1059</b>
Voltage	-	-	25 A factory / 20 A field
Wire section	-	-	600 V
Torque	-	-	12 AWG
FILE	-	-	4.5 Lb-in
			E178356

### MATERIALS

Housing	PA - UL 94 V0
---------	---------------

Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Nickel-plated copper alloy
SCIP Number	d4eeff2-21c2-4f26-a2b7-faede95e76ca

**COLOURS**

Standard	On request					
<b>BK</b>	<b>GN</b>	<b>GY</b>	<b>BL</b>	<b>RD</b>	<b>YL</b>	<b>OG</b>

<b>POLES</b>	<b>NAME</b>	<b>3D FILE</b>
1	MVI1-12,7-V	File not available for this product
2	MVI2-12,7-V	File not available for this product