


MVS15_-5-H

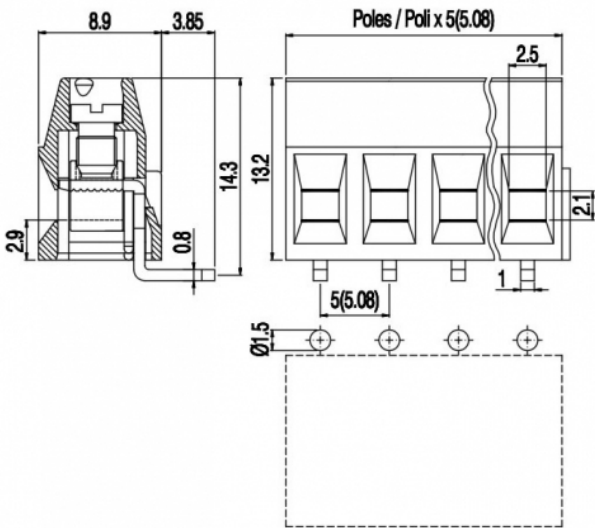

GENERAL INFORMATION

pitch	5 mm
Height	13.2 mm
Depth	8.9 mm
Dimensional class	Bassa
Wire section	1.5 mm² / 16 AWG
Clamp opening size	2.5 x 3.1 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	17.5 A
Voltage	450 V
Test Voltage	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	m3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 60998-1		UL 1059
Current	17.5 A	-	17.5 A factory / 10 A field
Voltage	450 V	-	300 V
Wire section	1.5 mm²	-	16 ÷ 30 AWG
Torque	2.5 Nm	-	4.5 Lb-in
FILE	CA02.00598	-	E178356

MATERIALS		
Housing		PA - UL 94 V0
Screw		Galvanized steel
Clamp		Nickel-plated copper alloy
Terminal		Tin-plated copper alloy
SCIP Number		713ad43e-8dff-4607-9cfa-843d4a730153

COLOURS		
Standard	On request	
		
		
		

POLES	NAME	3D FILE
2	MVS152-5-H	File available
3	MVS153-5-H	File not available for this product
4	MVS154-5-H	File not available for this product
5	MVS155-5-H	File not available for this product
6	MVS156-5-H	File not available for this product
7	MVS157-5-H	File not available for this product
8	MVS158-5-H	File not available for this product
9	MVS159-5-H	File not available for this product
10	MVS1510-5-H	File not available for this product
11	MVS1511-5-H	File not available for this product
12	MVS1512-5-H	File not available for this product