


# MVSP25\_-5,08-H

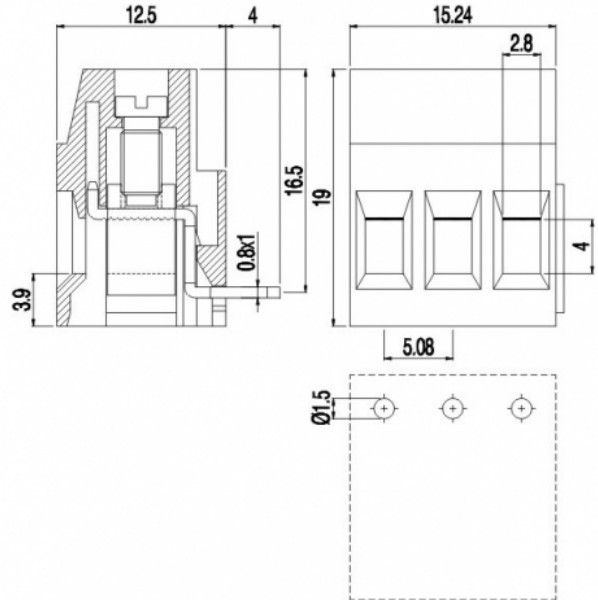

### GENERAL INFORMATION

pitch	5,08 mm
Height	19 mm
Depth	12.5 mm
Dimensional class	Media
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2.8 x 4 mm
Wire stripping	max 9.5 mm
Operating temperature	-40 ÷ +130 °C

### ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	450 V
Test Voltage	2.5 kVrms/60s

### MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

### APPROVALS DATA



	<b>EN 60998-1</b>		<b>UL 1059</b>
Current	24 A	-	18 A factory / 15 A field
Voltage	450 V	-	300 V
Wire section	2.5 mm <sup>2</sup>	-	14 ÷ 30 AWG
Torque	0.8 Nm	-	4.5 Lb-in

FILE CA02.00599 - E178356

**MATERIALS**

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	4857c4e6-479f-4765-acd0-7361f5cc6333

**COLOURS**

Standard	On request					
						

POLES	NAME	3D FILE
2	MVSP252-5,08-H	File available
3	MVSP253-5,08-H	File available