
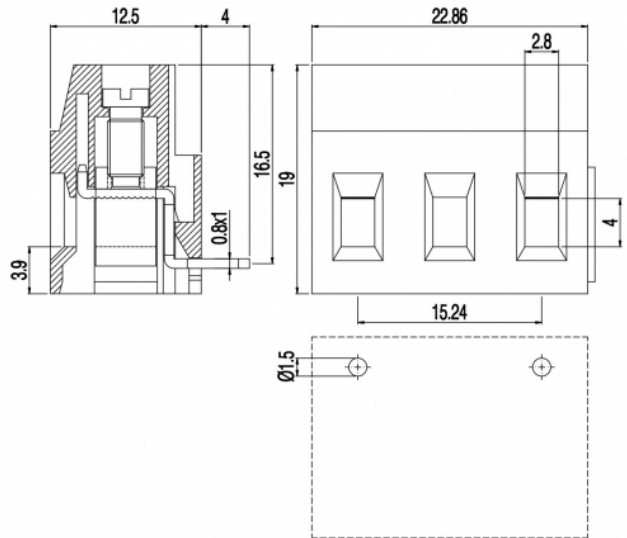


# MVSP27\_-15,24-H

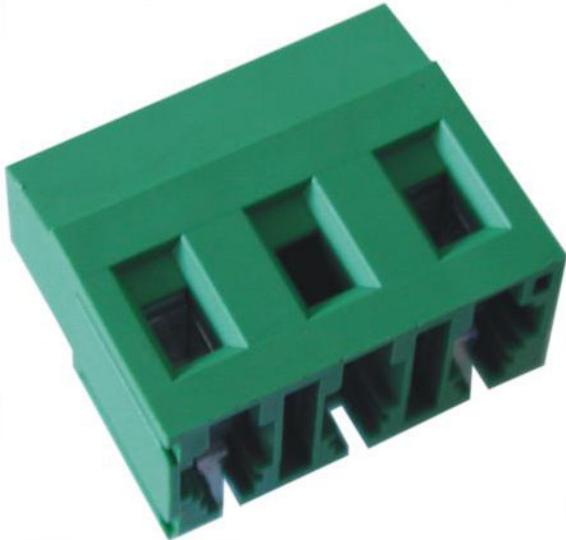

## GENERAL INFORMATION

pitch	15,24 mm
Height	19 mm
Depth	12.5 mm
Dimensional class	Media
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2.8 x 4 mm
Wire stripping	max 9.5 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	750 V
impulse voltage	3 kV

## MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

## APPROVALS DATA



	<b>EN 60998-1</b>		<b>UL 1059</b>
Current	24 A	-	20 A factory / 15 A field
Voltage	750 V	-	600 V
Wire section	2.4 mm <sup>2</sup>	-	14 AWG
Torque	0.8 Nm	-	4.5 Lb-in
FILE	CA02.00599	-	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy

SCIP Number

97a4c75c-d640-453d-b7b0-7dc991b80e95

**COLOURS**

Standard



On request



**POLES**

**NAME**

**3D FILE**

1  
2

MVSP271-15,24-H  
MVSP272-15,24-H

File not available for this product  
File not available for this product