
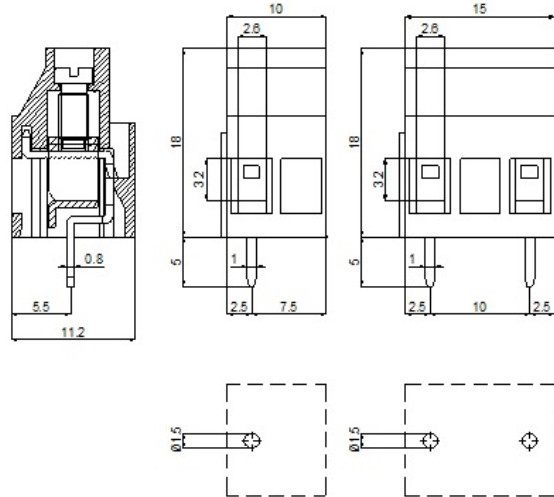


# MVST25\_-10-V

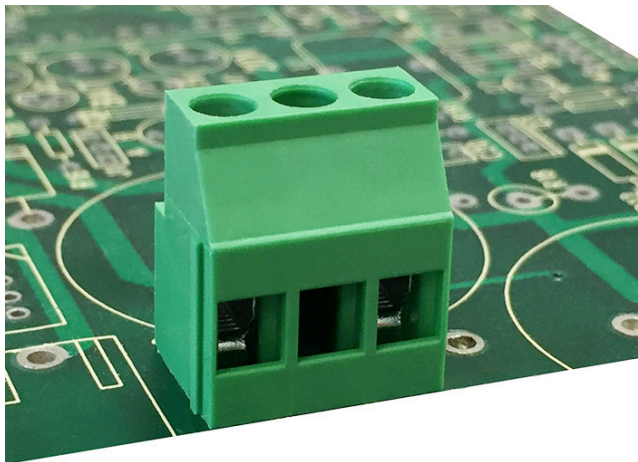

## GENERAL INFORMATION

pitch	10 mm
Height	18 mm
Depth	11.2 mm
Dimensional class	Media
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2.6 x 3.5 mm
Wire stripping	max 9 mm
Operating temperature	-40 ÷ +105 °C

## ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	250 V
impulse voltage	2 kV

## MECHANICAL CHARACTERISTICS

Screw	M2.5
Recommended torque	0.4÷0.44 Nm / 3.5÷3.9 in.lbs

## APPROVALS DATA



			<b>UL 1059</b>
Current	-	-	20 A factory / - A field
Voltage	-	-	300 V
Wire section	-	-	12 AWG
Torque	-	-	3.5 Lb-in
FILE	-	-	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy

**COLOURS**

Standard



On request

**POLES**

**NAME**

**3D FILE**

1	MVST251-10-V	File not available for this product
2	MVST252-10-V	File not available for this product