
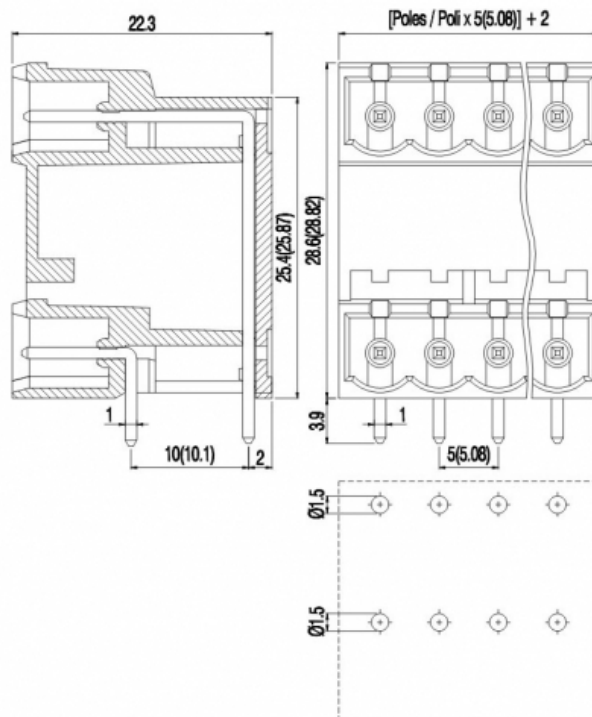


PDH__-5,08

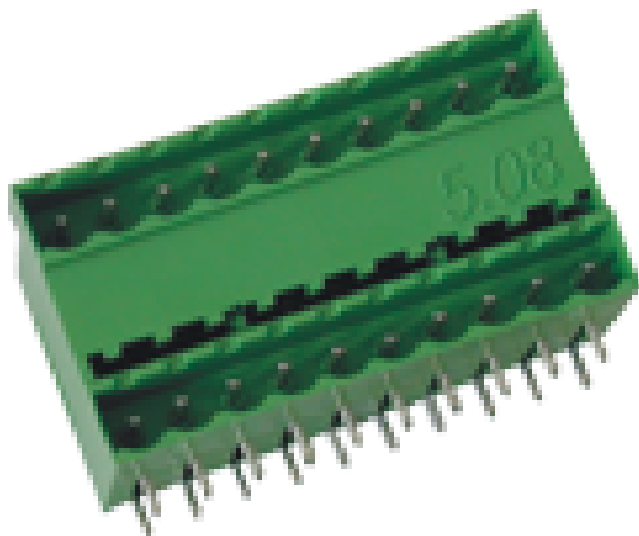

GENERAL INFORMATION

pitch	5,08 mm
Height	28.82 mm
Depth	22.3 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	500 V
impulse voltage	6 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



	EN 61984	EN 61984	UL 1059
Current	12 A	12 A	12 A factory / 12 A field
Voltage	250 V	250 V	300 V
Wire section	-	-	-
Torque	-	-	-
FILE	CA02.04178	40005779	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy

COLOURS

Standard



On request



POLES	NAME	3D FILE
02	PDH02-5,08	File available
03	PDH03-5,08	File not available for this product
04	PDH04-5,08	File not available for this product
05	PDH05-5,08	File not available for this product
06	PDH06-5,08	File not available for this product
07	PDH07-5,08	File not available for this product
08	PDH08-5,08	File available
09	PDH09-5,08	File not available for this product
10	PDH10-5,08	File not available for this product
11	PDH11-5,08	File not available for this product
12	PDH12-5,08	File not available for this product