
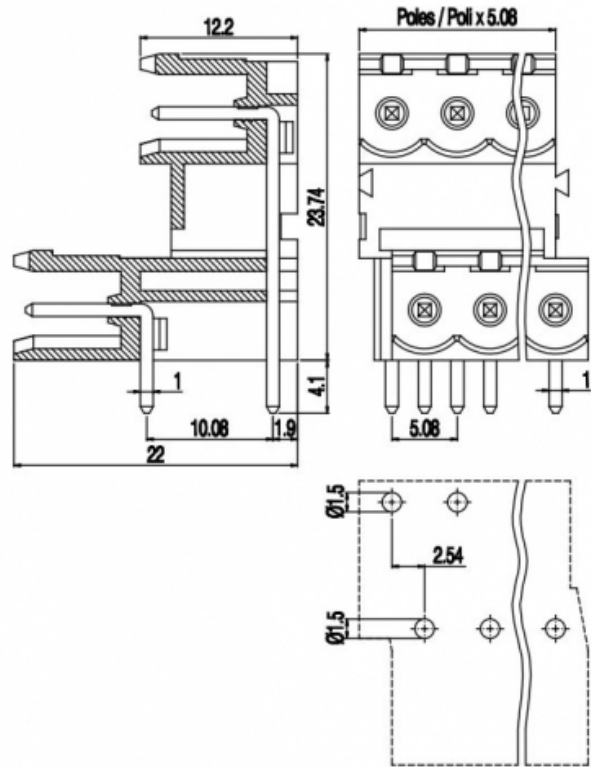


# PDSV\_\_-5,08-H

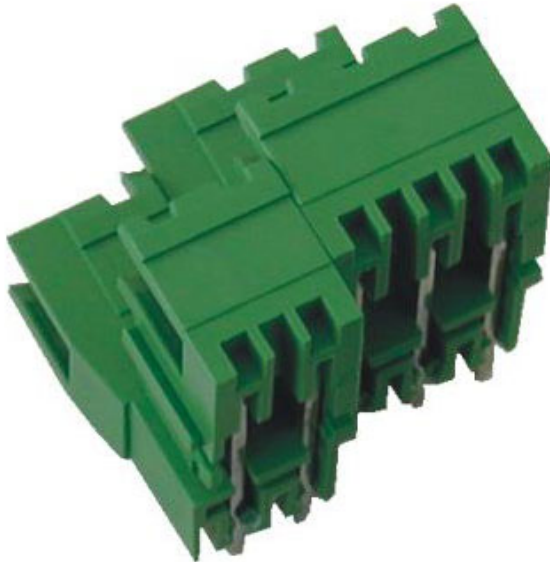

## GENERAL INFORMATION

pitch	5,08 mm
Height	23.74 mm
Depth	22 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	12 A
Voltage	250 V
impulse voltage	4 kV

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



EN 61984

Current	12 A
Voltage	250 V
Wire section	-



EN 61984

Current	12 A
Voltage	250 V



UL 1059

Current	12 A factory / 12 A field
Voltage	300 V

Torque - - -  
 FILE CA02.04178 40005779 E178356

**MATERIALS**

Housing PA - UL 94 V0  
 Screw -  
 Clamp -  
 Terminal Tin-plated copper alloy

**COLOURS**

Standard



On request



**POLES**

**NAME**

**3D FILE**

02	PDSV02-5,08-H	File available
03	PDSV03-5,08-H	File available