
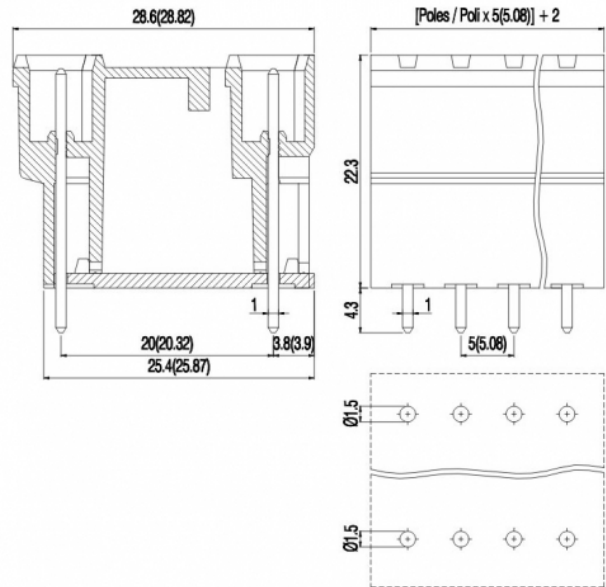


# PDV\_\_-5,08

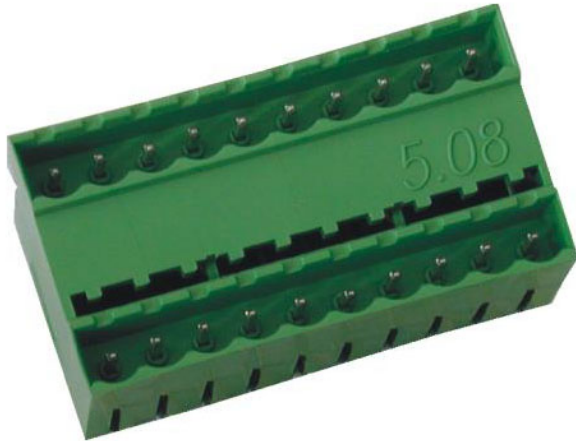

## GENERAL INFORMATION

pitch	5,08 mm
Height	22.3 mm
Depth	28.82 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	500 V
impulse voltage	6 kV

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



	<b>EN 61984</b>	<b>EN 61984</b>	<b>UL 1059</b>
Current	12 A	12 A	12 A factory / 12 A field
Voltage	250 V	250 V	300 V
Wire section	-	-	-
Torque	-	-	-
FILE	CA02.04178	40005779	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-

Terminal

Tin-plated copper alloy

**COLOURS**

Standard

On request



POLES	NAME	3D FILE
02	PDV02-5,08	File not available for this product
03	PDV03-5,08	File not available for this product
04	PDV04-5,08	File not available for this product
05	PDV05-5,08	File not available for this product
06	PDV06-5,08	File not available for this product
07	PDV07-5,08	File not available for this product
08	PDV08-5,08	File not available for this product
09	PDV09-5,08	File not available for this product
10	PDV10-5,08	File not available for this product
11	PDV11-5,08	File not available for this product
12	PDV12-5,08	File not available for this product