
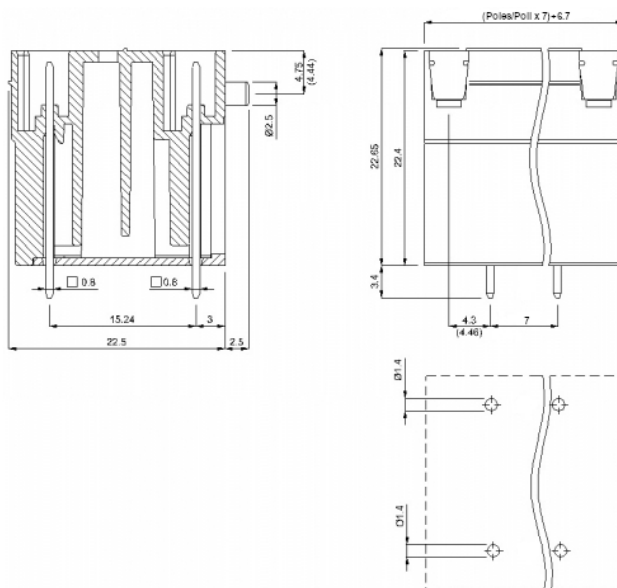


# PDV\_\_-7-V-K

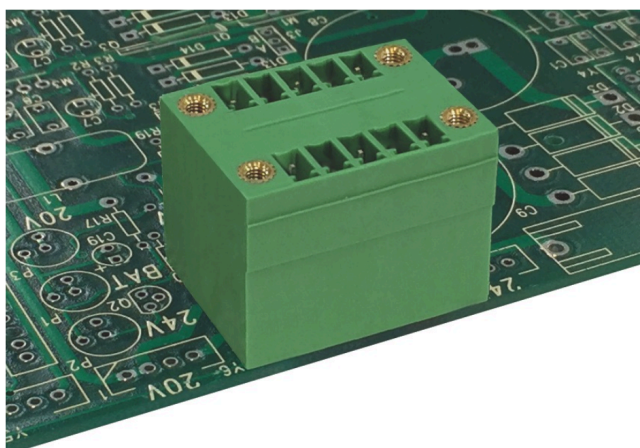

## GENERAL INFORMATION

pitch	7 mm
Height	22.65 mm
Depth	22.5 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	8 A
Voltage	400 V
impulse voltage	6 kV

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



		<b>EN 61984</b>	<b>UL 1059</b>
Current	-	8 A	11 A factory / 11 A field
Voltage	-	400 V	150V (C) V
Wire section	-	-	-
Torque	-	-	-
FILE	-	40048261	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy

**COLOURS**

Standard



On request



**POLES**

02

**NAME**

PDV02-7-V-K

**3D FILE**

File not available for this product