


PF__-10-H

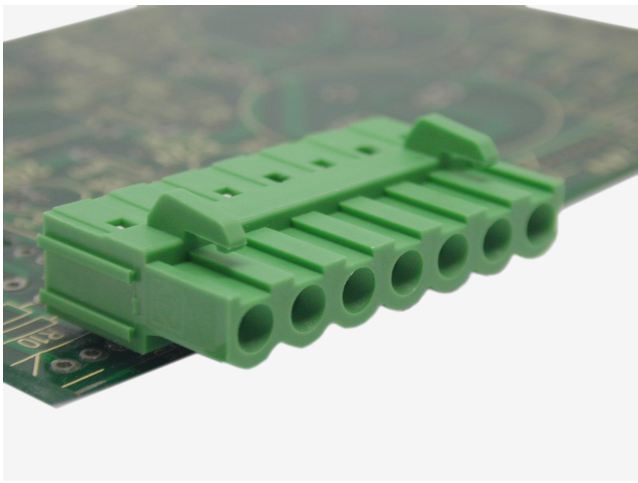

GENERAL INFORMATION

pitch	10 mm
Height	7.7 mm
Depth	18.85 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	15 A
Voltage	500 V
Test Voltage	4 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



			UL 1059
Current	-	-	22 A factory / 20 A field
Voltage	-	-	600 V
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy

COLOURS

Standard	On request
----------	------------

<div><div>GN</div><div>GY</div><div>BK</div><div>BL</div><div>RD</div><div>YL</div><div>OG</div></div>		
POLES	NAME	3D FILE
02	PF02-10-H	File not available for this product
03	PF03-10-H	File not available for this product
04	PF04-10-H	File not available for this product
05	PF05-10-H	File not available for this product
06	PF06-10-H	File not available for this product
07	PF07-10-H	File not available for this product
08	PF08-10-H	File not available for this product
09	PF09-10-H	File not available for this product
10	PF10-10-H	File not available for this product
11	PF11-10-H	File not available for this product
12	PF12-10-H	File not available for this product