
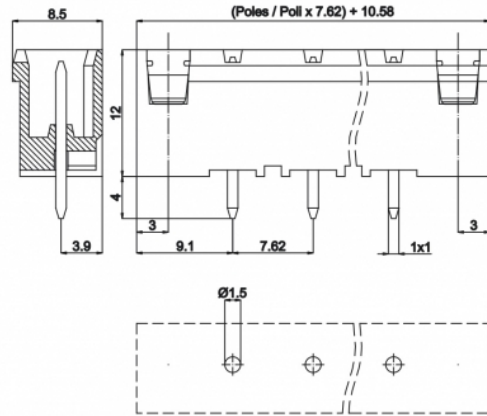


# PV\_\_-7,62-V-K2

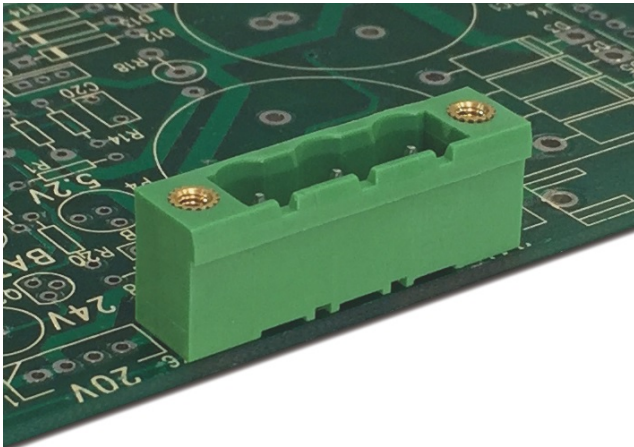

## GENERAL INFORMATION

pitch	7,62 mm
Height	8.5 mm
Depth	12 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	500 V
impulse voltage	6 kV

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



		<b>EN 61984</b>	<b>UL 1059</b>
Current	-	11 A	16 A factory / 16 A field
Voltage	-	400 V	300 V
Wire section	-	-	-
Torque	-	-	-
FILE	-	40048261	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	50a2d9f5-d869-429c-8804-927f1aa0f68c

## COLOURS

Standard

On request



POLES	NAME	3D FILE
02	PV02-7,62-V-K2	File not available for this product
03	PV03-7,62-V-K2	File not available for this product
04	PV04-7,62-V-K2	File not available for this product
05	PV05-7,62-V-K2	File not available for this product
06	PV06-7,62-V-K2	File not available for this product
07	PV07-7,62-V-K2	File not available for this product
08	PV08-7,62-V-K2	File not available for this product
09	PV09-7,62-V-K2	File not available for this product
10	PV10-7,62-V-K2	File not available for this product
11	PV11-7,62-V-K2	File not available for this product
12	PV12-7,62-V-K2	File not available for this product
13	PV13-7,62-V-K2	File not available for this product
14	PV14-7,62-V-K2	File not available for this product