
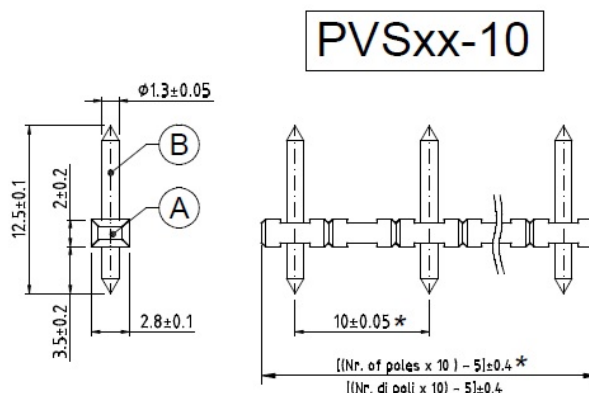


# PVS\_\_-10

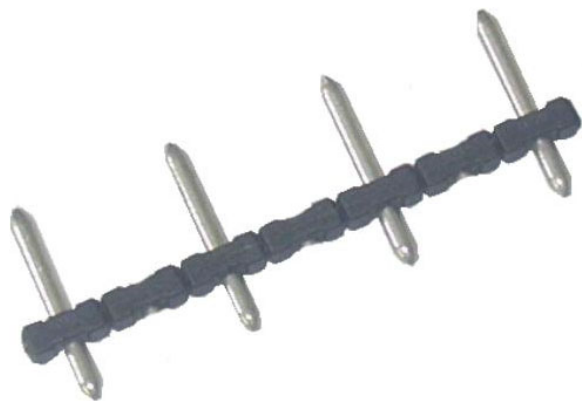

\* Dimension and tolerance are valid only for PCB soldering side  
 Quota e tolleranza valide soltanto per il lato del CS a saldare

## GENERAL INFORMATION

pitch	10 mm
Height	12.5 mm
Depth	2.8 mm
Dimensional class	Bassa
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	630 V
impulse voltage	6 kV

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



Current	-	<b>EN 61984</b>	<b>UL 1059</b>
Voltage	-	max. 20 A	18 A factory / 15 A field
Wire section	-	500 V	600 V
Torque	-	-	-
FILE	-	40053107	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	e7871ea5-2cf8-4f17-b626-38a85b04faba

## COLOURS

Standard



On request

<b>POLES</b>	<b>NAME</b>	<b>3D FILE</b>
02	PVS02-10	File available
03	PVS03-10	File available
04	PVS04-10	File available
05	PVS05-10	File available
06	PVS06-10	File available
07	PVS07-10	File available
08	PVS08-10	File available
09	PVS09-10	File available
10	PVS10-10	File available
11	PVS11-10	File available
12	PVS12-10	File available