


PVS__-3,5-L12,2

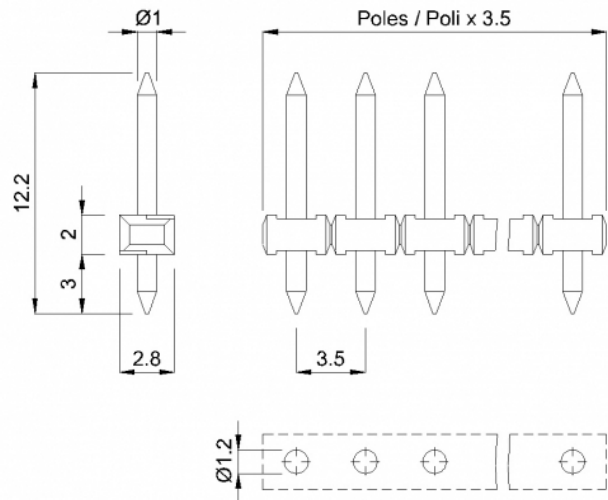

GENERAL INFORMATION

pitch	3,5 mm
Height	12.2 mm
Depth	2.8 mm
Dimensional class	Bassa
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	8 A
Voltage	160 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current	-	-	-
Voltage	-	-	-
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	-

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	e7871ea5-2cf8-4f17-b626-38a85b04faba

COLOURS

Standard

On request



POLES	NAME	3D FILE
02	PVS02-3,5-L12,2	File not available for this product
03	PVS03-3,5-L12,2	File not available for this product
04	PVS04-3,5-L12,2	File not available for this product
05	PVS05-3,5-L12,2	File not available for this product
06	PVS06-3,5-L12,2	File not available for this product
07	PVS07-3,5-L12,2	File not available for this product
08	PVS08-3,5-L12,2	File not available for this product
09	PVS09-3,5-L12,2	File not available for this product
10	PVS10-3,5-L12,2	File not available for this product
11	PVS11-3,5-L12,2	File not available for this product
12	PVS12-3,5-L12,2	File not available for this product
13	PVS13-3,5-L12,2	File not available for this product
14	PVS14-3,5-L12,2	File not available for this product
15	PVS15-3,5-L12,2	File not available for this product
16	PVS16-3,5-L12,2	File not available for this product
17	PVS17-3,5-L12,2	File not available for this product
18	PVS18-3,5-L12,2	File not available for this product
19	PVS19-3,5-L12,2	File not available for this product
20	PVS20-3,5-L12,2	File not available for this product
21	PVS21-3,5-L12,2	File not available for this product
22	PVS22-3,5-L12,2	File not available for this product
23	PVS23-3,5-L12,2	File not available for this product
24	PVS24-3,5-L12,2	File not available for this product