
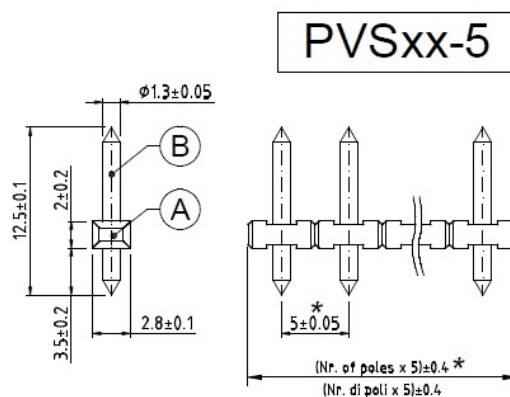


PVS__-5

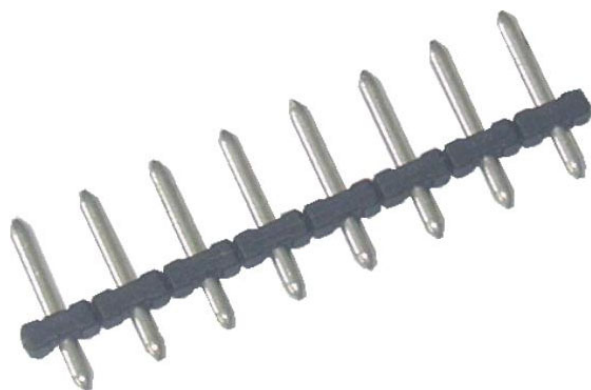

* Dimension and tolerance are valid only for PCB soldering side
 Quota e tolleranza valide soltanto per il lato del CS a saldare

GENERAL INFORMATION

pitch	5 mm
Height	12.5 mm
Depth	2.8 mm
Dimensional class	Bassa
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	250 V
impulse voltage	4 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA




Current	-	EN 61984	UL 1059
Voltage	-	max. 20 A	18 A factory / 15 A field
Wire section	-	250 V	300 V
Torque	-	-	-
FILE	-	40053107	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	e7871ea5-2cf8-4f17-b626-38a85b04faba

COLOURS

Standard



On request

POLES	NAME	3D FILE
02	PVS02-5	File available
03	PVS03-5	File available
04	PVS04-5	File available
05	PVS05-5	File available
06	PVS06-5	File available
07	PVS07-5	File available
08	PVS08-5	File available
09	PVS09-5	File available
10	PVS10-5	File available
11	PVS11-5	File available
12	PVS12-5	File available
13	PVS13-5	File available
14	PVS14-5	File available
15	PVS15-5	File available
16	PVS16-5	File available
17	PVS17-5	File available
18	PVS18-5	File available
19	PVS19-5	File available
20	PVS20-5	File available
21	PVS21-5	File available
22	PVS22-5	File available
23	PVS23-5	File available
24	PVS24-5	File available