
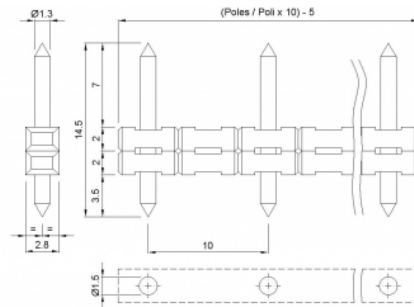


PVSD__-10

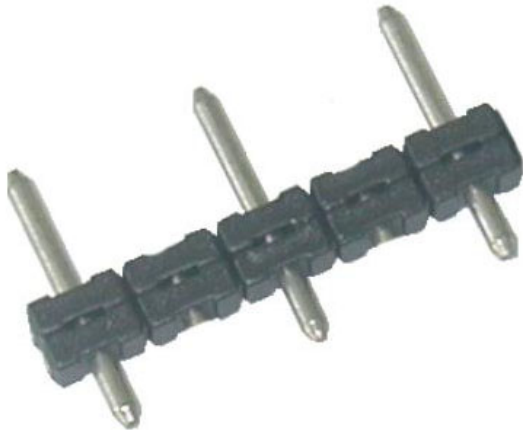

GENERAL INFORMATION

pitch	10 mm
Height	14.5 mm
Depth	2.8 mm
Dimensional class	Bassa
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	630 V
impulse voltage	6 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



			UL 1059
Current	-	-	18 A factory / 15 A field
Voltage	-	-	300 V
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	e7871ea5-2cf8-4f17-b626-38a85b04faba

COLOURS

Standard

On request



POLES	NAME	3D FILE
02	PVSD02-10	File available
03	PVSD03-10	File available
04	PVSD04-10	File available
05	PVSD05-10	File available
06	PVSD06-10	File available
07	PVSD07-10	File available
08	PVSD08-10	File available
09	PVSD09-10	File available
10	PVSD10-10	File available
11	PVSD11-10	File available
12	PVSD12-10	File available