


PVSD__-5

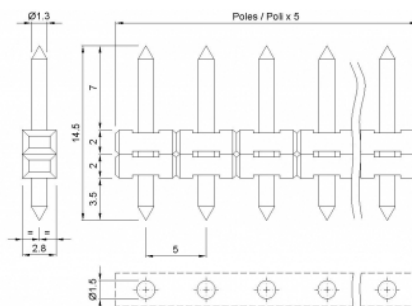

GENERAL INFORMATION

pitch	5 mm
Height	14.5 mm
Depth	2.8 mm
Dimensional class	Bassa
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	250 V
impulse voltage	4 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current	-	-	UL 1059
Voltage	-	-	18 A factory / 15 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	e7871ea5-2cf8-4f17-b626-38a85b04faba

COLOURS

Standard

On request



POLES	NAME	3D FILE
02	PVSD02-5	File available
03	PVSD03-5	File available
04	PVSD04-5	File available
05	PVSD05-5	File available
06	PVSD06-5	File available
07	PVSD07-5	File available
08	PVSD08-5	File available
09	PVSD09-5	File available
10	PVSD10-5	File available
11	PVSD11-5	File available
12	PVSD12-5	File available
13	PVSD13-5	File available
14	PVSD14-5	File available
15	PVSD15-5	File available
16	PVSD16-5	File available
17	PVSD17-5	File available
18	PVSD18-5	File available
19	PVSD19-5	File available
20	PVSD20-5	File available
21	PVSD21-5	File available
22	PVSD22-5	File available
23	PVSD23-5	File available
24	PVSD24-5	File available