


PVST__-10

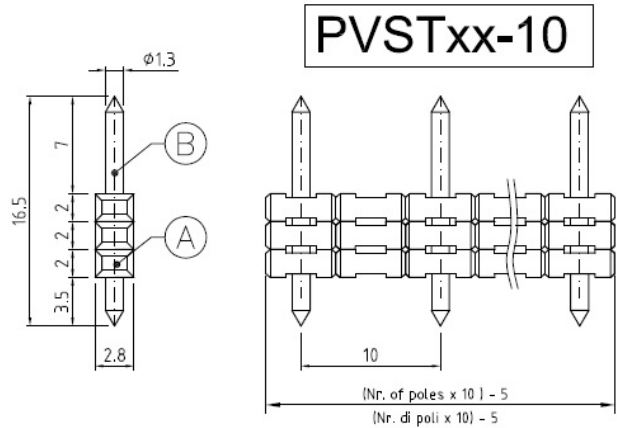

GENERAL INFORMATION

pitch	10 mm
Height	16.5 mm
Depth	2.8 mm
Dimensional class	Bassa
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	630 V
impulse voltage	6 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



		EN 61984	UL 1059
Current	-	max. 20 A	-
Voltage	-	500 V	300 V
Wire section	-	-	-
Torque	-	-	-
FILE	-	40053107	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	e7871ea5-2cf8-4f17-b626-38a85b04faba

COLOURS

Standard

On request



POLES	NAME	3D FILE
02	PVST02-10	File available
03	PVST03-10	File available
04	PVST04-10	File available
05	PVST05-10	File available
06	PVST06-10	File available
07	PVST07-10	File available
08	PVST08-10	File available
09	PVST09-10	File available
10	PVST10-10	File available
11	PVST11-10	File available
12	PVST12-10	File available