


# PVST\_\_-5

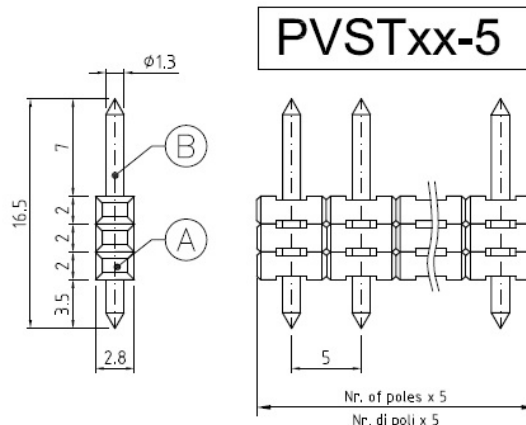

## GENERAL INFORMATION

pitch	5 mm
Height	16.5 mm
Depth	2.8 mm
Dimensional class	Bassa
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	250 V
impulse voltage	4 kV

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



Current	-	<b>EN 61984</b>	<b>UL 1059</b>
Voltage	-	max. 20 A	18 A factory / 15 A field
Wire section	-	250 V	300 V
Torque	-	-	-
FILE	-	40053107	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	e7871 ea5-2cf8-4f17-b626-38a85b04faba

## COLOURS

Standard



On request

POLES	NAME	3D FILE
02	PVST02-5	File available
03	PVST03-5	File available
04	PVST04-5	File available
05	PVST05-5	File available
06	PVST06-5	File available
07	PVST07-5	File available
08	PVST08-5	File available
09	PVST09-5	File available
10	PVST10-5	File available
11	PVST11-5	File available
12	PVST12-5	File available
13	PVST13-5	File available
14	PVST14-5	File available
15	PVST15-5	File available
16	PVST16-5	File available
17	PVST17-5	File available
18	PVST18-5	File available
19	PVST19-5	File available
20	PVST20-5	File available
21	PVST21-5	File available
22	PVST22-5	File available
23	PVST23-5	File available
24	PVST24-5	File available