
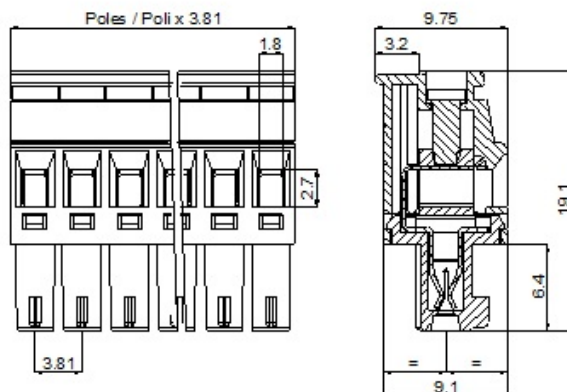


# SV\_\_-3,81-F

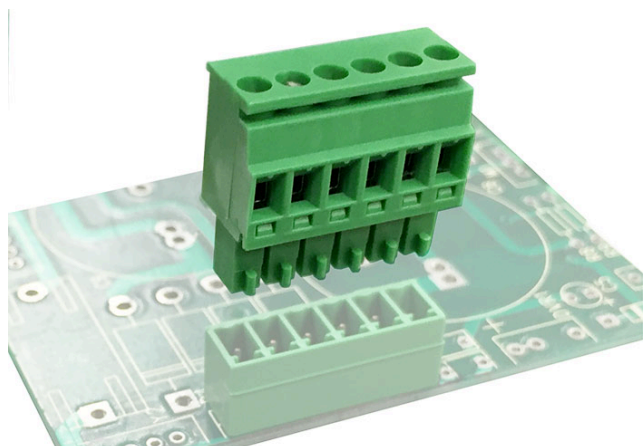

## GENERAL INFORMATION

pitch	3,81 mm
Height	19.1 mm
Depth	9.75 mm
Dimensional class	Media
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	1.8 x 2.7 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	11 A
Voltage	160 V
impulse voltage	2.5 kV

## MECHANICAL CHARACTERISTICS

Screw	M2
Recommended torque	0.25÷0.275 Nm / 2.3÷2.5 in.lbs

## APPROVALS DATA



		EN 61984	UL 1059
Current	-	11 A	11 A factory / 11 A field
Voltage	-	200 V	300 V
Wire section	-	2.5 mm <sup>2</sup>	14 AWG
Torque	-	0.25 Nm	2.3 Lb-in
FILE	-	40048261	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	873c875e-ec80-466b-a1f7-2cd8e6506a38

**COLOURS**

Standard



On request



POLES	NAME	3D FILE
02	SV02-3,81-F	File not available for this product
03	SV03-3,81-F	File not available for this product
04	SV04-3,81-F	File available
05	SV05-3,81-F	File available
06	SV06-3,81-F	File available
07	SV07-3,81-F	File not available for this product
08	SV08-3,81-F	File not available for this product
09	SV09-3,81-F	File not available for this product
10	SV10-3,81-F	File not available for this product
11	SV11-3,81-F	File not available for this product
12	SV12-3,81-F	File not available for this product
13	SV13-3,81-F	File not available for this product
14	SV14-3,81-F	File not available for this product
15	SV15-3,81-F	File not available for this product
16	SV16-3,81-F	File not available for this product
17	SV17-3,81-F	File not available for this product
18	SV18-3,81-F	File not available for this product
19	SV19-3,81-F	File not available for this product
20	SV20-3,81-F	File not available for this product
21	SV21-3,81-F	File not available for this product
22	SV22-3,81-F	File not available for this product
23	SV23-3,81-F	File not available for this product
24	SV24-3,81-F	File not available for this product