


MBE15_-5,08-V-L

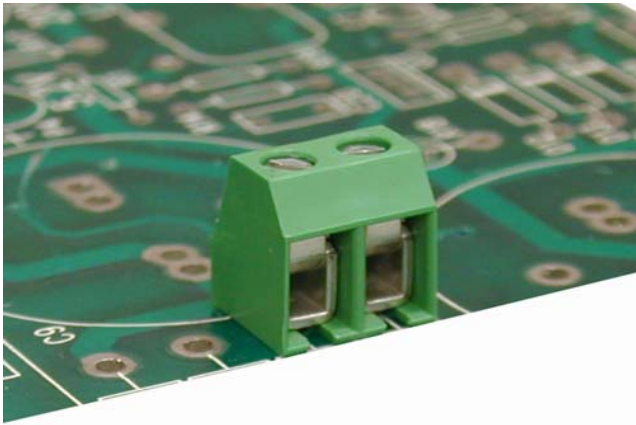

GENERAL INFORMATION

pitch	5,08 mm
Height	10.20 mm
Depth	8.6 mm
Dimensional class	Bassa
Wire section	2,5 mm ² / 14 AWG
Clamp opening size	2,6 x 2 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	450 V
Test Voltage	2,5 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M2,5
Recommended torque	0,4÷0 Nm / 3,6÷3.3 in.lbs

APPROVALS DATA



	EN 60998-1	EN 60998-1	UL 1059
Current	17,5 A	24 A	20 A factory / 15 A field
Voltage	450 V	450 V	300 V
Wire section	1,5 mm ²	2,5 mm ²	14 ÷ 30 AWG
Torque	0,4 Nm	0,4 Nm	3,6 Lb-in
FILE	EP151	40019705	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Tin-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	f96aa5fb-ce76-4818-a732-b41ce6983956

COLOURS

Standard

On request

GN

GY

BK

BL

RD

YL

OG

POLES

NAME

3D FILE

2
3

MBE152-5,08-V-L
MBE153-5,08-V-L

File not available for this product
File not available for this product