


MLK13_-3,81-V

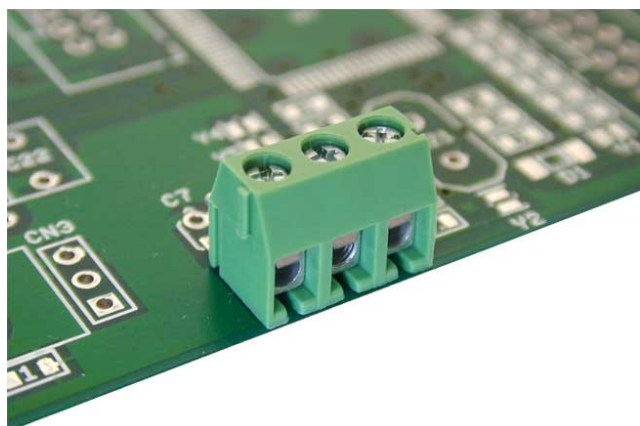

GENERAL INFORMATION

pitch	3,81 mm
Height	8.4 mm
Depth	6.8 mm
Dimensional class	Bassa
Wire section	1.0 mm ² / 24 AWG
Clamp opening size	1.8 x 1.8 mm
Wire stripping	max 5,5 mm
Operating temperature	-30 ÷ +105 °C

ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	130 V
impulse voltage	1.0 kV

MECHANICAL CHARACTERISTICS

Screw	M2
Recommended torque	0.2÷0.22 Nm / 1.8÷2 in.lbs

APPROVALS DATA



UL 1059

Current	-	-	10 A factory / 10 A field
Voltage	-	-	300 V
Wire section	-	-	16 AWG
Torque	-	-	1.8 Lb-in
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Tin-plated copper alloy
Terminal	Tin-plated copper alloy

COLOURS

Standard



On request

POLES	NAME	3D FILE
2	MLK132-3,81-V	File not available for this product
3	MLK133-3,81-V	File not available for this product