


MP6__-10-H

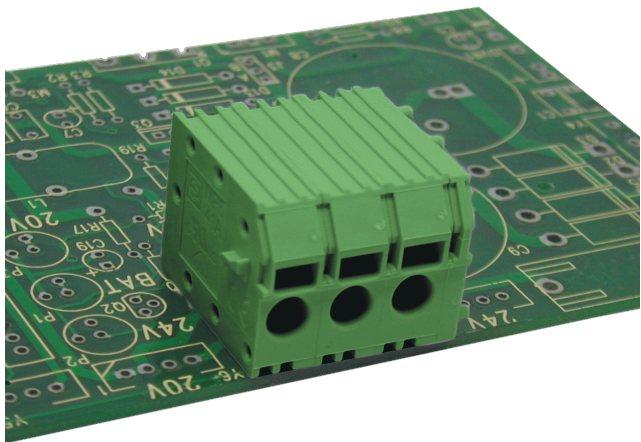

GENERAL INFORMATION

pitch	7,5 mm
Height	24.25 mm
Depth	19.6 mm
Dimensional class	Alta
Wire section	4 mm² / 12 AWG
Clamp opening size	-
Wire stripping	max 21 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	41 A
Voltage	750 V
Test Voltage	-

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current	-	-	-
Voltage	-	-	-
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	-

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Spring	Spring steel
Terminal	Tin-plated copper alloy

COLOURS

Standard



On request



POLES	NAME	3D FILE
01	MP601-10-H	File not available for this product
02	MP602-10-H	File not available for this product
03	MP603-10-H	File not available for this product
04	MP604-10-H	File not available for this product
05	MP605-10-H	File not available for this product
06	MP606-10-H	File not available for this product
07	MP607-10-H	File not available for this product
08	MP608-10-H	File not available for this product
09	MP609-10-H	File not available for this product
10	MP610-10-H	File not available for this product
11	MP611-10-H	File not available for this product
12	MP612-10-H	File not available for this product
13	MP613-10-H	File not available for this product
14	MP614-10-H	File not available for this product
16	MP616-10-H	File not available for this product
17	MP617-10-H	File not available for this product
18	MP618-10-H	File not available for this product
19	MP619-10-H	File not available for this product
20	MP620-10-H	File not available for this product
21	MP621-10-H	File not available for this product
22	MP622-10-H	File not available for this product