
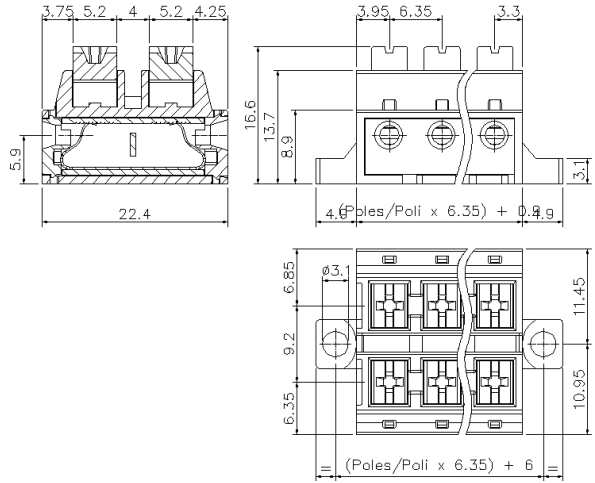


MPL2__-6,35-K

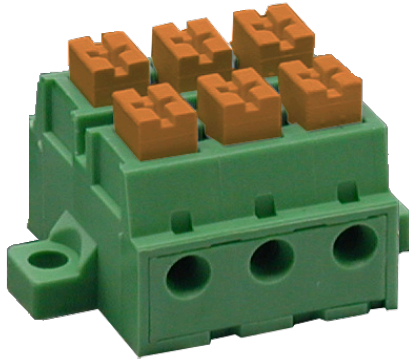

GENERAL INFORMATION

| | |
|-----------------------|------------------------------|
| pitch | 6,35 mm |
| Height | - |
| Depth | - |
| Dimensional class | Media |
| Wire section | 2.5 mm ² / 14 AWG |
| Clamp opening size | - |
| Wire stripping | max 13 mm |
| Operating temperature | -40 ÷ +100 °C |

ELECTRICAL CHARACTERISTICS

| | |
|-----------------|--------|
| Current | 24 A |
| Voltage | 450 V |
| impulse voltage | 2.5 kV |

MECHANICAL CHARACTERISTICS

| | |
|--------------------|---|
| Screw | - |
| Recommended torque | - |

APPROVALS DATA



| | | | |
|--------------|---|---|---|
| Current | - | - | - |
| Voltage | - | - | - |
| Wire section | - | - | - |
| Torque | - | - | - |
| FILE | - | - | - |

MATERIALS

| | |
|----------|-------------------------|
| Housing | PA - UL 94 V0 |
| Screw | - |
| Clamp | - |
| Terminal | Tin-plated copper alloy |

COLOURS

Standard

On request

GN

GY

BK

BL

RD

YL

OG

| POLES | NAME | 3D FILE |
|--------------|---------------|-------------------------------------|
| 02 | MPL202-6,35-K | File not available for this product |
| 03 | MPL203-6,35-K | File not available for this product |