
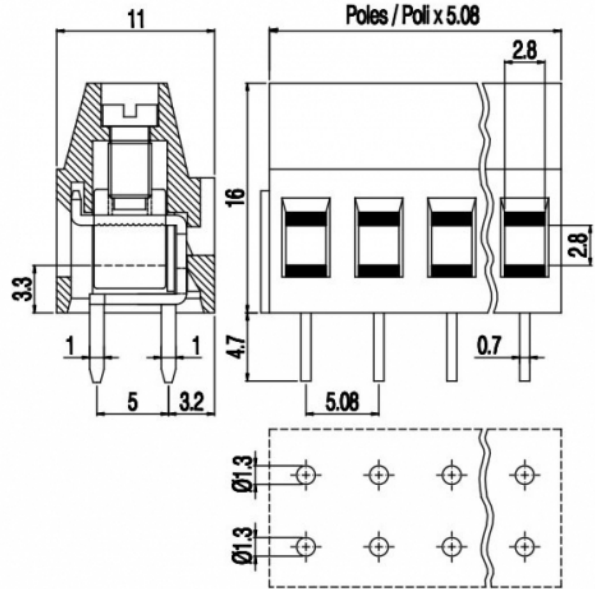


MV25D_-5,08-V

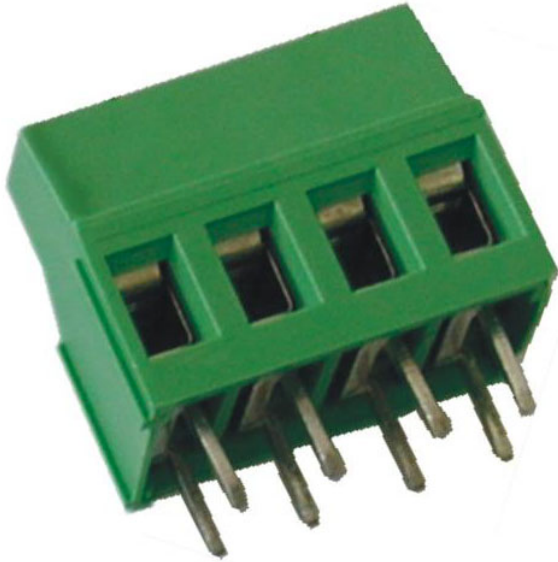

GENERAL INFORMATION

| | |
|-----------------------|------------------------------|
| pitch | 5,08 mm |
| Height | 16 mm |
| Depth | 11 mm |
| Dimensional class | Media |
| Wire section | 2.5 mm ² / 14 AWG |
| Clamp opening size | 2.8 x 2.8 mm |
| Wire stripping | max 8 mm |
| Operating temperature | -40 ÷ +130 °C |

ELECTRICAL CHARACTERISTICS

| | |
|-----------------|-------|
| Current | 24 A |
| Voltage | 250 V |
| impulse voltage | 2 kV |

MECHANICAL CHARACTERISTICS

| | |
|--------------------|------------------------------|
| Screw | M3 |
| Recommended torque | 0.8÷0.88 Nm / 7.2÷7.9 in.lbs |

APPROVALS DATA



| | EN 60998-1 | | UL 1059 |
|--------------|---------------------|---|---------------------------|
| Current | 24 A | - | 18 A factory / 15 A field |
| Voltage | 250 V | - | 300 V |
| Wire section | 2.5 mm ² | - | 14 AWG |
| Torque | 0.8 Nm | - | 4.5 Lb-in |
| FILE | CA02.00599 | - | E178356 |

MATERIALS

| | |
|---------|----------------------------|
| Housing | PA - UL 94 V0 |
| Screw | Galvanized steel |
| Clamp | Nickel-plated copper alloy |

Terminal
SCIP Number

Tin-plated copper alloy
2ac6f6ad-4e84-41b5-a9bc-100a23dd428c

COLOURS

Standard



On request



POLES

NAME

3D FILE

| | | |
|---|---------------|----------------|
| 2 | MV25D2-5,08-V | File available |
| 3 | MV25D3-5,08-V | File available |
| 4 | MV25D4-5,08-V | File available |
| 8 | MV25D8-5,08-V | File available |