


# MVE26\_-7,5-V-L

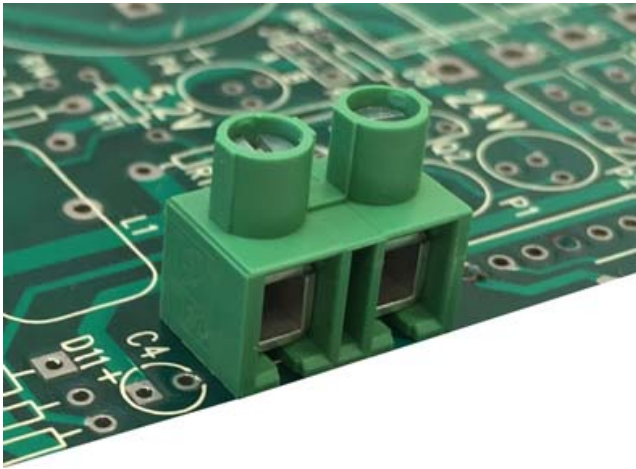

### GENERAL INFORMATION

pitch	7,5 mm
Height	12.8 mm
Depth	8.4 mm
Dimensional class	Bassa
Wire section	2.5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2.5 x 3 mm
Wire stripping	max 7.5 mm
Operating temperature	-40 ÷ +130 °C

### ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	750 V
impulse voltage	3 kV

### MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

### APPROVALS DATA



		EN 60998-1	UL 1059
Current	-	24 A	26 A factory / 20 A field
Voltage	-	750 V	300 V
Wire section	-	2,5 mm <sup>2</sup>	12 AWG
Torque	-	0,5 Nm	4,5 Lb-in
FILE	-	40019705	E178356

### MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Tin-plated copper alloy
Terminal	Tin-plated copper alloy

### COLOURS

Standard

On request

**GN****GY****BK****BL****RD****YL****OG**

<b>POLES</b>	<b>NAME</b>	<b>3D FILE</b>
2	MVE262-7,5-V-L	File not available for this product
3	MVE263-7,5-V-L	File not available for this product
4	MVE264-7,5-V-L	File not available for this product
5	MVE265-7,5-V-L	File not available for this product
6	MVE266-7,5-V-L	File not available for this product
7	MVE267-7,5-V-L	File not available for this product
8	MVE268-7,5-V-L	File not available for this product
9	MVE269-7,5-V-L	File not available for this product
10	MVE2610-7,5-V-L	File not available for this product
11	MVE2611-7,5-V-L	File not available for this product
12	MVE2612-7,5-V-L	File not available for this product
13	MVE2613-7,5-V-L	File not available for this product
14	MVE2614-7,5-V-L	File not available for this product
15	MVE2615-7,5-V-L	File not available for this product
16	MVE2616-7,5-V-L	File not available for this product