
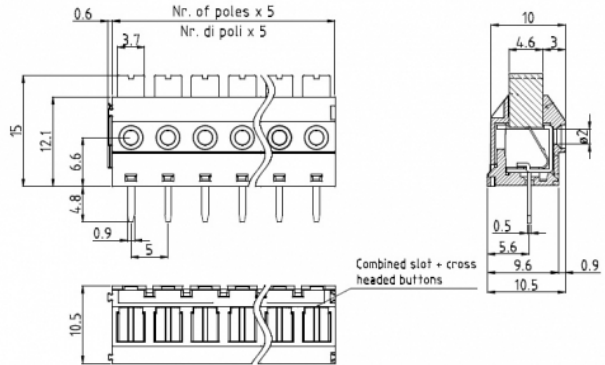


# MVEM5\_\_-5-V

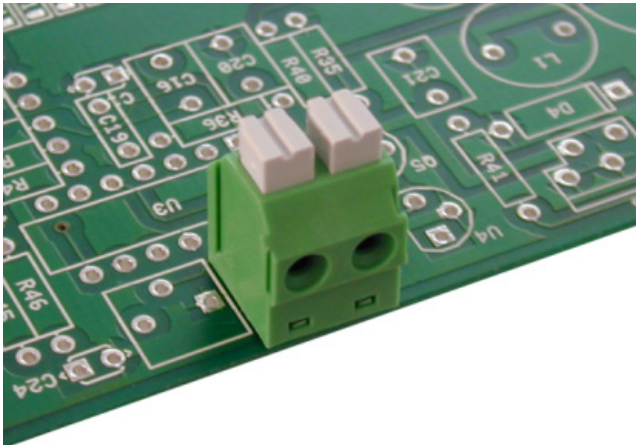

## GENERAL INFORMATION

pitch	5 mm
Height	15 mm
Depth	10.5 mm
Dimensional class	Bassa
Wire section	1.5 mm <sup>2</sup> / 16 AWG
Clamp opening size	1.5 x 1.5 mm
Wire stripping	max 11 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	10 A
Voltage	250 V
impulse voltage	2 kV

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



			<b>UL 1059</b>
Current	-	-	8 A factory / 8 A field
Voltage	-	-	300 V
Wire section	-	-	16 AWG
Torque	-	-	-
FILE	-	-	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Spring	Spring steel
Terminal	Tin-plated copper alloy

## COLOURS

Standard



On request



<b>POLES</b>	<b>NAME</b>	<b>3D FILE</b>
02	MVEM502-5-V	File available
03	MVEM503-5-V	File available
04	MVEM504-5-V	File not available for this product
05	MVEM505-5-V	File not available for this product
06	MVEM506-5-V	File not available for this product