


# MVI\_-6,35-V

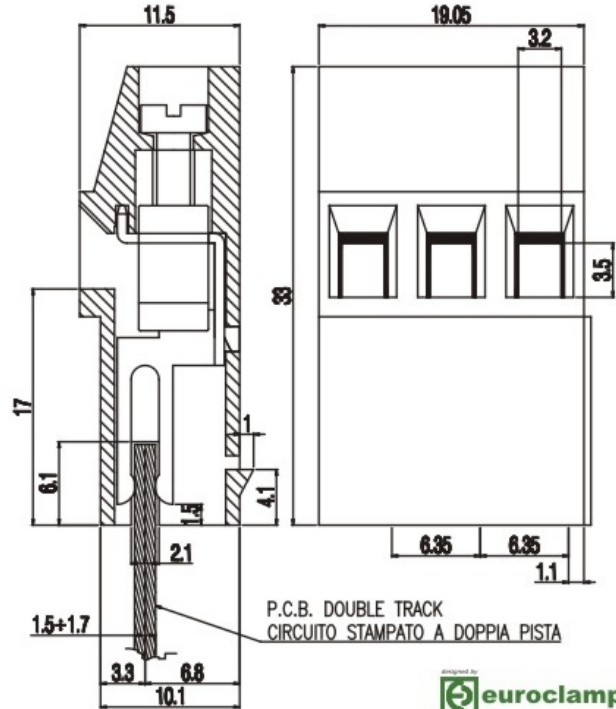

## GENERAL INFORMATION

pitch	6,35 mm
Height	33 mm
Depth	11.5 mm
Dimensional class	Media
Wire section	4.0 mm <sup>2</sup> / 12 AWG
Clamp opening size	3.2 x 3.5 mm
Wire stripping	max 10 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	25 A
Voltage	450 V
impulse voltage	2.5 kV

## MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

## APPROVALS DATA



Current	-	-	<b>UL 1059</b>
Voltage	-	-	25 A factory / 20 A field
Wire section	-	-	300 V
Torque	-	-	12 AWG
FILE	-	-	4.5 Lb-in
			E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Nickel-plated copper alloy
SCIP Number	d4eeff2-21c2-4f26-a2b7-faede95e76ca

**COLOURS**

Standard



On request



POLES	NAME	3D FILE
2	MVI2-6,35-V	File available
3	MVI3-6,35-V	File available