


MZx / PRC-x

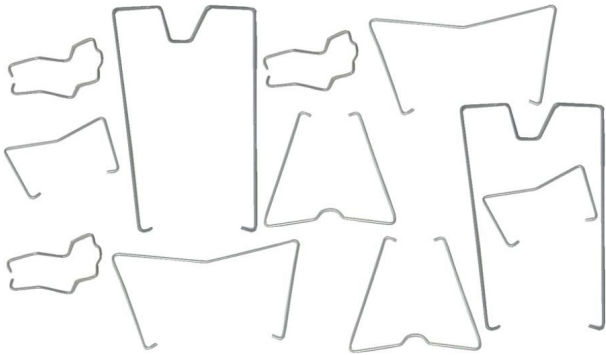

GENERAL INFORMATION

| | |
|-----------------------|------|
| pitch | - |
| Height | - |
| Depth | - |
| Dimensional class | Alta |
| Wire section | - |
| Clamp opening size | - |
| Wire stripping | - |
| Operating temperature | - |

ELECTRICAL CHARACTERISTICS

| | |
|-----------------|---|
| Current | - |
| Voltage | - |
| impulse voltage | - |

MECHANICAL CHARACTERISTICS

| | |
|--------------------|---|
| Screw | - |
| Recommended torque | - |

APPROVALS DATA



| | | | |
|--------------|---|---|---|
| Current | - | - | - |
| Voltage | - | - | - |
| Wire section | - | - | - |
| Torque | - | - | - |
| FILE | - | - | - |

MATERIALS

| | |
|----------|----------------------------|
| Housing | PA - UL 94 V0 |
| Screw | Galvanized steel |
| Clamp | Nickel-plated copper alloy |
| Terminal | Tin-plated copper alloy |

COLOURS

Standard



On request