
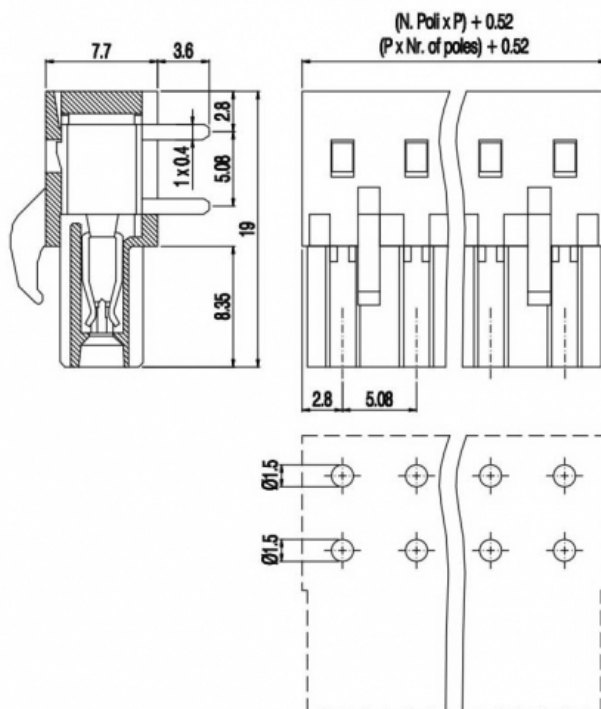


# PF\_\_-5,08-H

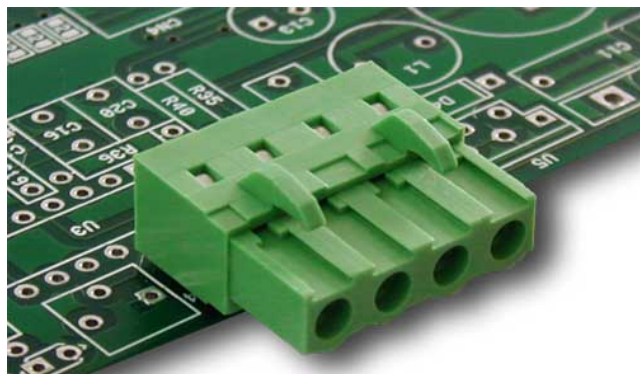

### GENERAL INFORMATION

pitch	5,08 mm
Height	7.7 mm
Depth	19 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +105 °C

### ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
impulse voltage	4 kV

### MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

### APPROVALS DATA



Current	-	-	<b>UL 1059</b>
Voltage	-	-	22 A factory / 20 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

### MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy

**COLOURS**



POLES	NAME	3D FILE
02	PF02-5,08-H	File available
03	PF03-5,08-H	File available
04	PF04-5,08-H	File available
05	PF05-5,08-H	File not available for this product
06	PF06-5,08-H	File not available for this product
07	PF07-5,08-H	File not available for this product
08	PF08-5,08-H	File not available for this product
09	PF09-5,08-H	File not available for this product
10	PF10-5,08-H	File not available for this product
11	PF11-5,08-H	File not available for this product
12	PF12-5,08-H	File not available for this product