
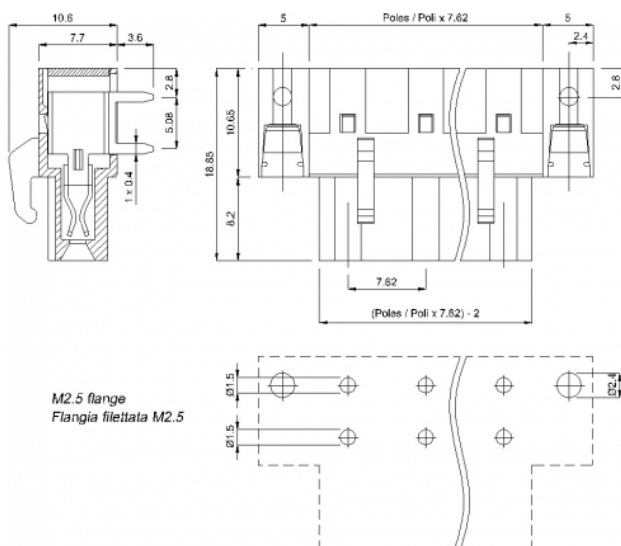


# PF\_\_-7,62-H-K

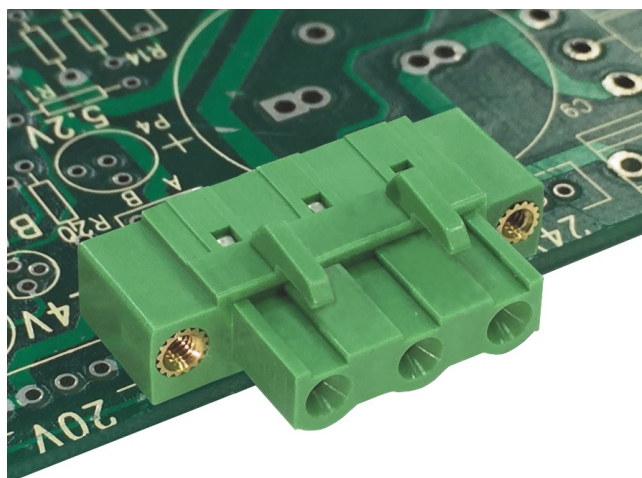

## GENERAL INFORMATION

pitch	7,62 mm
Height	18.85 mm
Depth	7.7 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +105 °C

## ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	500 V
impulse voltage	6 kV

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



Current	-	-	<b>UL 1059</b>
Voltage	-	-	22 A factory / 20 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy

## COLOURS

Standard

On request



<b>POLES</b>	<b>NAME</b>	<b>3D FILE</b>
02	PF02-7,62-H-K	File not available for this product
03	PF03-7,62-H-K	File not available for this product
04	PF04-7,62-H-K	File not available for this product
05	PF05-7,62-H-K	File not available for this product
06	PF06-7,62-H-K	File not available for this product
07	PF07-7,62-H-K	File not available for this product
08	PF08-7,62-H-K	File not available for this product