
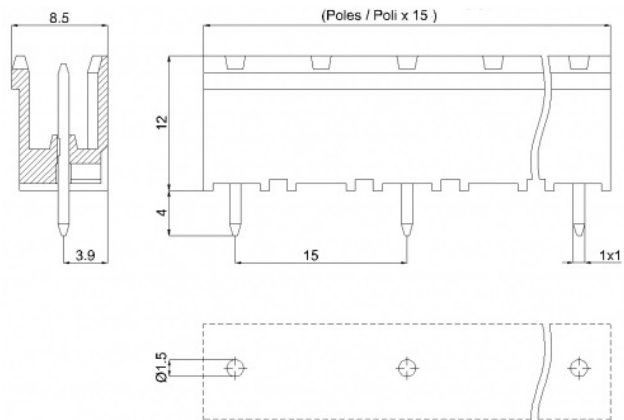


# PV\_\_-15-V

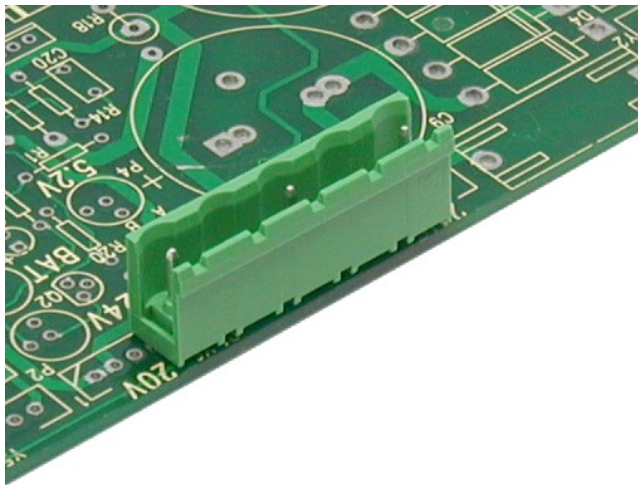

## GENERAL INFORMATION

pitch	15 mm
Height	12 mm
Depth	8.5 mm
Dimensional class	Media
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	15 A
Voltage	1000 V
impulse voltage	8 kV

## MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

## APPROVALS DATA



	<b>EN 61984</b>	<b>EN 61984</b>	<b>UL 1059</b>
Current	16 A	15 A	16 A factory / 16 A field
Voltage	500 V	500 V	600 V
Wire section	-	-	-
Torque	-	-	-
FILE	CA02.04178	40005779	E178356

## MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
SCIP Number	892ed63d-670d-4367-9365-34dfcaff593c

## COLOURS

Standard

On request

**GN**

**GY**

**BK**

**BL**

**RD**

**YL**

**OG**

<b>POLES</b>	<b>NAME</b>	<b>3D FILE</b>
02	PV02-15-V	File not available for this product
03	PV03-15-V	File not available for this product
04	PV04-15-V	File not available for this product
05	PV05-15-V	File not available for this product
06	PV06-15-V	File not available for this product
07	PV07-15-V	File not available for this product
08	PV08-15-V	File not available for this product