
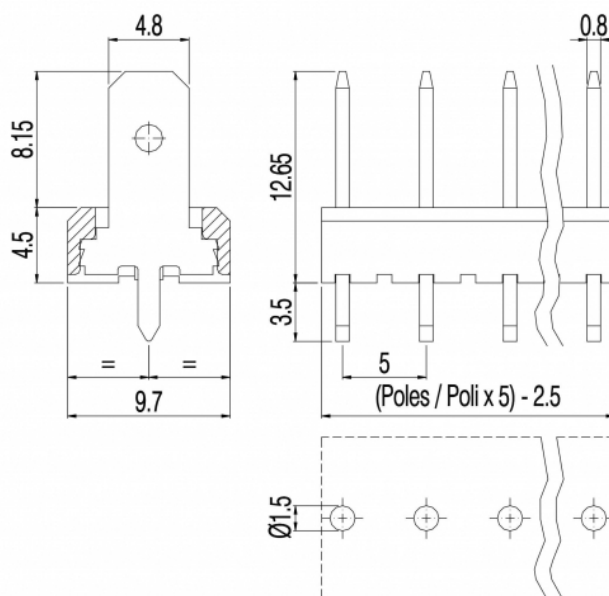


# PVSF\_\_-5-V-S48-1F

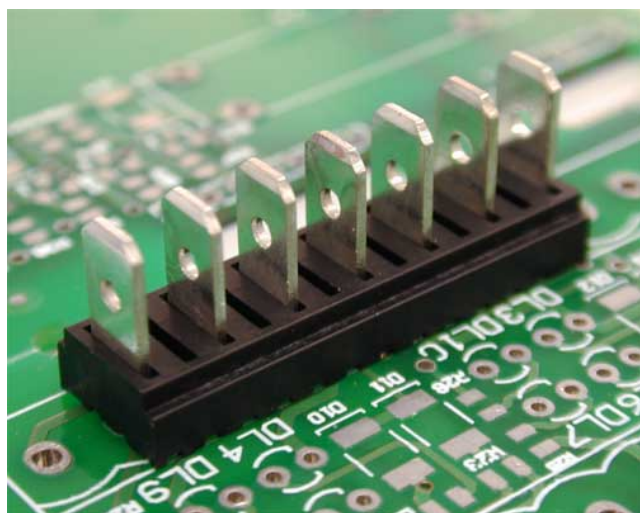

**GENERAL INFORMATION**

pitch	5 mm
Height	12.65 mm
Depth	9.7 mm
Dimensional class	n/a
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-

**ELECTRICAL CHARACTERISTICS**

Current	24 A
Voltage	250 V
Test Voltage	4 kVrms/60s

**MECHANICAL CHARACTERISTICS**

Screw	-
Recommended torque	-

**APPROVALS DATA**



Current	-	-	<b>UL 1059</b>
Voltage	-	-	18 A factory / 15 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

**MATERIALS**

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	-

SCIP Number

**COLOURS**

Standard



On request



**POLES**

**NAME**

**3D FILE**

02	PVSF02-5-V-S48-1F	File not available for this product
03	PVSF03-5-V-S48-1F	File not available for this product
04	PVSF04-5-V-S48-1F	File not available for this product
05	PVSF05-5-V-S48-1F	File not available for this product
06	PVSF06-5-V-S48-1F	File not available for this product
07	PVSF07-5-V-S48-1F	File not available for this product
08	PVSF08-5-V-S48-1F	File not available for this product
09	PVSF09-5-V-S48-1F	File not available for this product
10	PVSF10-5-V-S48-1F	File not available for this product
11	PVSF11-5-V-S48-1F	File not available for this product
12	PVSF12-5-V-S48-1F	File not available for this product
13	PVSF13-5-V-S48-1F	File not available for this product
14	PVSF14-5-V-S48-1F	File not available for this product
15	PVSF15-5-V-S48-1F	File not available for this product
16	PVSF16-5-V-S48-1F	File not available for this product
17	PVSF17-5-V-S48-1F	File not available for this product
18	PVSF18-5-V-S48-1F	File not available for this product
19	PVSF19-5-V-S48-1F	File not available for this product
20	PVSF20-5-V-S48-1F	File not available for this product
21	PVSF21-5-V-S48-1F	File not available for this product
22	PVSF22-5-V-S48-1F	File not available for this product
23	PVSF23-5-V-S48-1F	File not available for this product
24	PVSF24-5-V-S48-1F	File not available for this product