
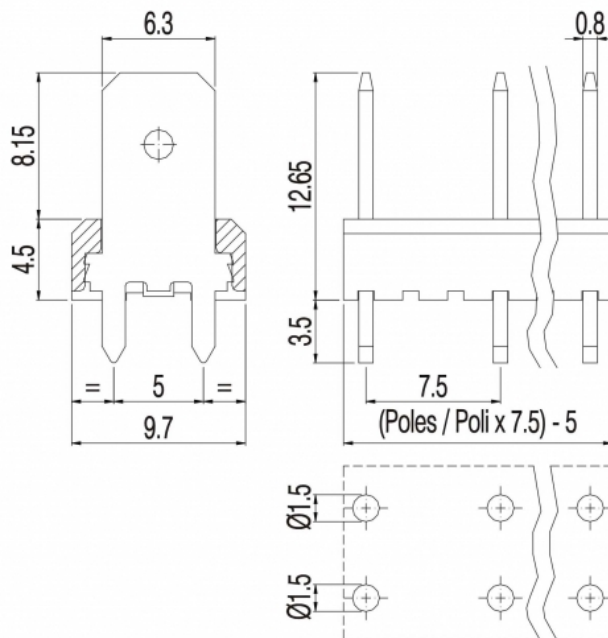


PVSF__-7,5-V-D68-1F

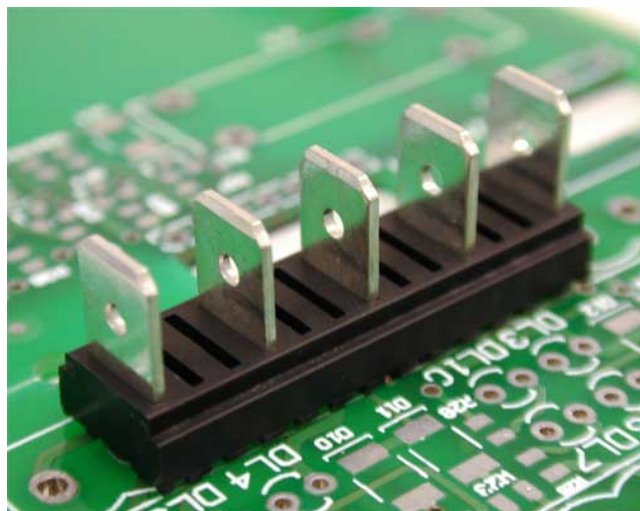

GENERAL INFORMATION

pitch	7,5 mm
Height	12.65 mm
Depth	9.7 mm
Dimensional class	n/a
Wire section	-
Clamp opening size	-
Wire stripping	-
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	24 A
Voltage	400 V
impulse voltage	6 kV

MECHANICAL CHARACTERISTICS

Screw	-
Recommended torque	-

APPROVALS DATA



Current	-	-	UL 1059
Voltage	-	-	18 A factory / 15 A field
Wire section	-	-	300 V
Torque	-	-	-
FILE	-	-	E178356

MATERIALS

Housing	PA - UL 94 V0
---------	---------------

Screw -
 Clamp -
 Terminal -
 SCIP Number e7871ea5-2cf8-4f17-b626-38a85b04faba

COLOURS

Standard



On request



POLES	NAME	3D FILE
02	PVSF02-7,5-V-D68-1F	File not available for this product
03	PVSF03-7,5-V-D68-1F	File not available for this product
04	PVSF04-7,5-V-D68-1F	File not available for this product
05	PVSF05-7,5-V-D68-1F	File not available for this product
06	PVSF06-7,5-V-D68-1F	File not available for this product
07	PVSF07-7,5-V-D68-1F	File not available for this product
08	PVSF08-7,5-V-D68-1F	File not available for this product
09	PVSF09-7,5-V-D68-1F	File not available for this product
10	PVSF10-7,5-V-D68-1F	File not available for this product
11	PVSF11-7,5-V-D68-1F	File not available for this product
12	PVSF12-7,5-V-D68-1F	File not available for this product
13	PVSF13-7,5-V-D68-1F	File not available for this product
14	PVSF14-7,5-V-D68-1F	File not available for this product
15	PVSF15-7,5-V-D68-1F	File not available for this product
16	PVSF16-7,5-V-D68-1F	File not available for this product
17	PVSF17-7,5-V-D68-1F	File not available for this product
18	PVSF18-7,5-V-D68-1F	File not available for this product
19	PVSF19-7,5-V-D68-1F	File not available for this product
20	PVSF20-7,5-V-D68-1F	File not available for this product