


SH__-10,16-K

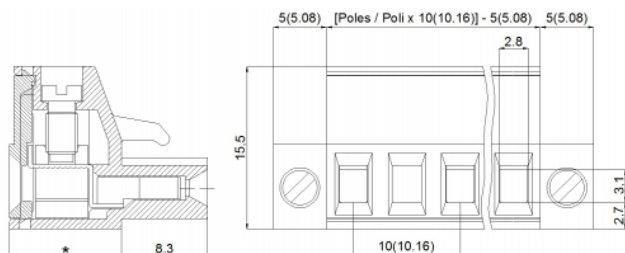

* = 10.55 for/per SH02+11-10,16-K
 * = 10.55 for/per SH02+07-10-K
 * = 10.9 for/per SH08+11-10-K

M3 flange screw
 Flangia a vite M3

GENERAL INFORMATION

pitch	10,16 mm
Height	15.5 mm
Depth	18.8 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	500 V
impulse voltage	6 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 61984	EN 61984	UL 1059
Current	16 A	15 A	12 A factory / 12 A field
Voltage	500 V	500 V	600 V
Wire section	2.5 mm ²	2.5 mm ²	14 AWG
Torque	0.5 Nm	0.5 Nm	4.5 Lb-in
FILE	CA02.04178	40005779	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Copper alloy
SCIP Number	2b16c5e0-b81c-4d1f-839d-5472703af01d

COLOURS

Standard



On request



POLES	NAME	3D FILE
02	SH02-10,16-K	File not available for this product
03	SH03-10,16-K	File not available for this product
04	SH04-10,16-K	File not available for this product
05	SH05-10,16-K	File not available for this product
06	SH06-10,16-K	File not available for this product
07	SH07-10,16-K	File not available for this product
08	SH08-10,16-K	File not available for this product
09	SH09-10,16-K	File not available for this product
10	SH10-10,16-K	File not available for this product
11	SH11-10,16-K	File not available for this product