


SH__-3,5

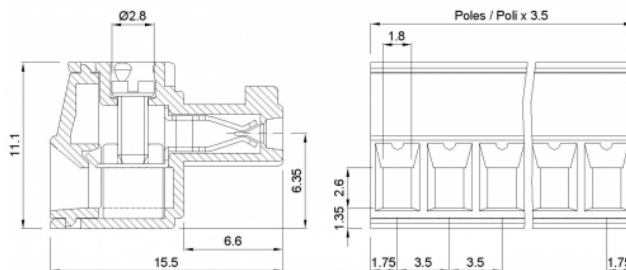

GENERAL INFORMATION

pitch	3,5 mm
Height	11.1 mm
Depth	15.5 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	1.8 x 2.6 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	11 A
Voltage	160 V
impulse voltage	2.5 kV

MECHANICAL CHARACTERISTICS

Screw	M2
Recommended torque	0.25÷0.27 Nm / 2.3÷2.5 in.lbs

APPROVALS DATA



		EN 61984	UL 1059
Current	-	11 A	11 A factory / 11 A field
Voltage	-	200 V	300 V
Wire section	-	2.5 mm ²	14 AWG
Torque	-	0.25 Nm	2.3 Lb-in
FILE	-	40048261	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Copper alloy
SCIP Number	bfb0c281-a82f-4739-a58f-ccd9c58cc7dd

COLOURS

Standard

On request

GN

GY

BK

BL

RD

YL

OG

POLES	NAME	3D FILE
02	SH02-3,5	File available
03	SH03-3,5	File available
04	SH04-3,5	File available
05	SH05-3,5	File available
06	SH06-3,5	File available
07	SH07-3,5	File available
08	SH08-3,5	File available
09	SH09-3,5	File available
10	SH10-3,5	File available
11	SH11-3,5	File available
12	SH12-3,5	File available
13	SH13-3,5	File available
14	SH14-3,5	File available
15	SH15-3,5	File available
16	SH16-3,5	File available
17	SH17-3,5	File available
18	SH18-3,5	File available
19	SH19-3,5	File available
20	SH20-3,5	File available
21	SH21-3,5	File available
22	SH22-3,5	File available
23	SH23-3,5	File available
24	SH24-3,5	File available