


SH__-5

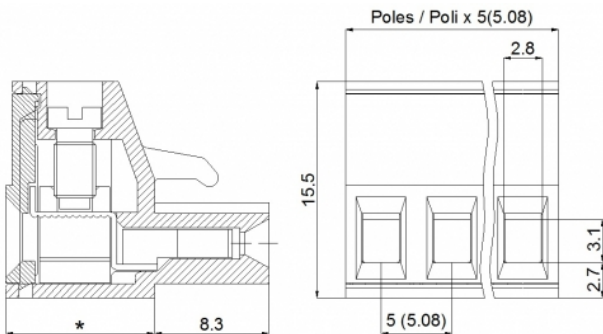

* = 10.55 for/per SH02+24-5,08
* = 10.55 for/per SH02+15-5
* = 10.9 for/per SH16+24-5

GENERAL INFORMATION

pitch	5 mm
Height	15.5 mm
Depth	18.85 mm
Dimensional class	Media
Wire section	2.5 mm² / 14÷30 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 8 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
Test Voltage	4 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 61984	EN 61984	UL 1059
Current	16 A	12 A	12 A factory / 12 A field
Voltage	250 V	250 V	300 V
Wire section	2.5 mm²	2.5 mm²	14÷30 ÷ 30 AWG
Torque	0.5 Nm	0.5 Nm	4.5 Lb-in
FILE	CA02.04178	40005779	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	2b16c5e0-b81c-4d1f-839d-5472703af01d

COLOURS

			Standard	On request					
			GN	GY	BK	BL	RD	YL	OG
POLES	NAME		3D FILE						
02	SH02-5		File available						
03	SH03-5		File available						
04	SH04-5		File available						
05	SH05-5		File available						
06	SH06-5		File available						
07	SH07-5		File available						
08	SH08-5		File available						
09	SH09-5		File available						
10	SH10-5		File available						
11	SH11-5		File available						
12	SH12-5		File available						
13	SH13-5		File not available for this product						
14	SH14-5		File not available for this product						
15	SH15-5		File not available for this product						
16	SH16-5		File available						
17	SH17-5		File not available for this product						
18	SH18-5		File not available for this product						
19	SH19-5		File not available for this product						
20	SH20-5		File not available for this product						
21	SH21-5		File not available for this product						
22	SH22-5		File not available for this product						
23	SH23-5		File not available for this product						
24	SH24-5		File not available for this product						