


# SHCS\_\_-5

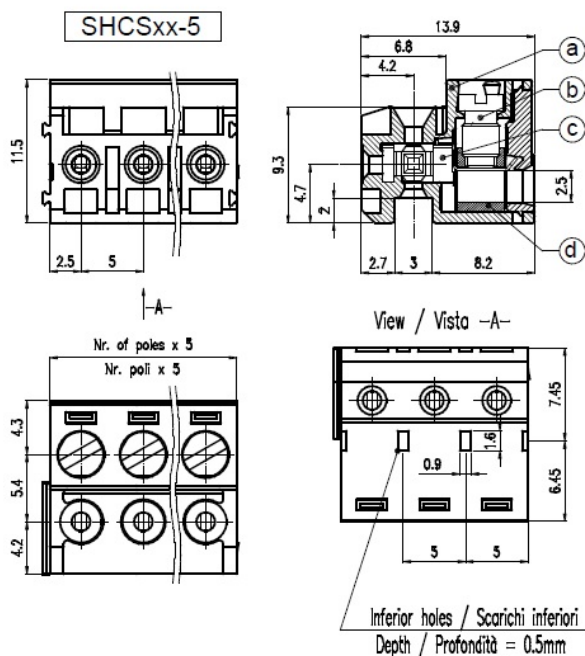

## GENERAL INFORMATION

pitch	5 mm
Height	11.5 mm
Depth	13.9 mm
Dimensional class	Media
Wire section	2,5 mm <sup>2</sup> / 14 AWG
Clamp opening size	2,5 x 2,5 mm
Wire stripping	max 7 mm
Operating temperature	-40 ÷ +130 °C

## ELECTRICAL CHARACTERISTICS

Current	15 A
Voltage	250 V
impulse voltage	4 kV

## MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0,5÷0,55 Nm / 4,5÷4,9 in.lbs

## APPROVALS DATA



		EN 61984	UL 1059
Current	-	20 A	18 A factory / 15 A field
Voltage	-	200 V	300 V
Wire section	-	0.2÷2.5 mm <sup>2</sup>	14 AWG
Torque	-	0.5 Nm	4,5 Lb-in
FILE	-	40053107	E178356

## MATERIALS

Housing	PA - UL 94 V0
---------	---------------

Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Tin-plated copper alloy
SCIP Number	8f3ed649-5dcd-4973-a9c9-d71b7f8f530d

**COLOURS**

Standard



On request



POLES	NAME	3D FILE
02	SHCS02-5	File available
03	SHCS03-5	File available
04	SHCS04-5	File available
05	SHCS05-5	File available
06	SHCS06-5	File available
07	SHCS07-5	File available
08	SHCS08-5	File available
09	SHCS09-5	File available
10	SHCS10-5	File available
11	SHCS11-5	File available
12	SHCS12-5	File available